




**Magnetic Drills**  
Page 3



**"12,000-Series"  
Cutters**  
Page 16

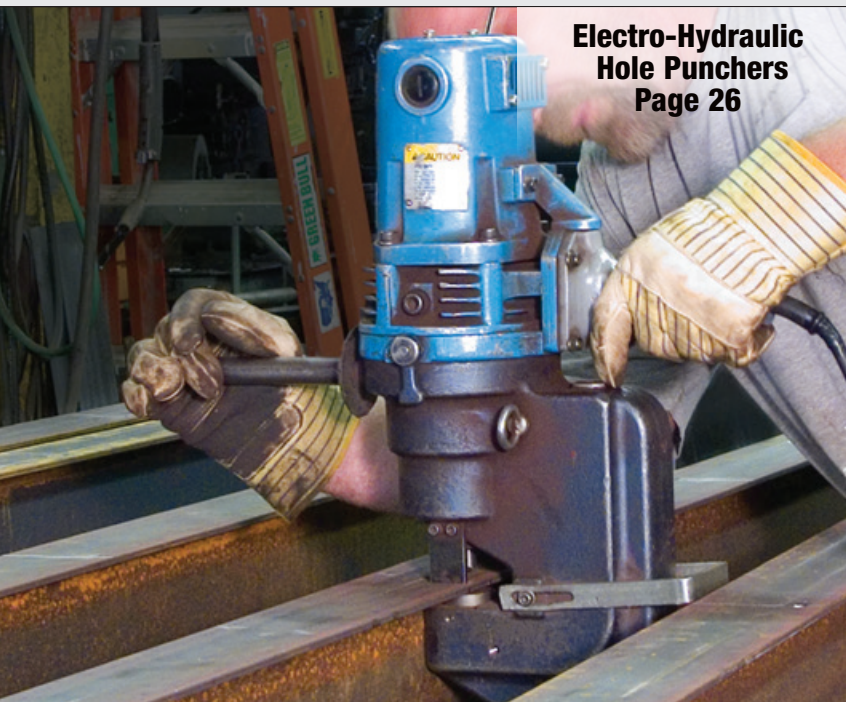

**Electro-Hydraulic  
Hole Punchers**  
Page 26

**NEW  
MAG DRILLS**



**PORTABLE  
MAGNETIC  
DRILLS,  
HOLE PUNCHERS,  
ACCESSORIES,  
AND  
FABRICATION  
TOOLS**

**Volume 14**

**WWW.HOUGEN.COM**

**NEW!**

**THIS YEAR!**

**REDESIGNED  
HMD904  
MAG DRILL**  
(Page 6)



**HMD933 INDUSTRIAL  
DUTY MAG DRILL**  
(Page 11)



**75002.5PR & 75004PR  
HOLE PUNCHERS**  
(Page 32 & 33)



**INDEX**

**Magnetic Drills**

Pilot Light .....	3
HMD115 .....	4
HMD150 .....	5
HMD904 .....	6
HMD905 .....	7
HMD927 .....	8
HMD917 .....	9
HMD505/508.....	10
HMD933 .....	11
Magnetic Drill Comparison Chart .....	12
Magnetic Drill Accessories .....	13-15
Lubricant .....	15

**Cutters**

Cutter Comparison Chart .....	16
"12,000-Series" Cutters .....	18
"12,000-Series" Fusion™/ Pilots .....	19
"12,000-Series" TiN Cutters/ Kits .....	20
RotaLoc™ & RotaLoc Plus™ Cutters .....	21

Copperhead™ Carbide Cutters .....	22
"42/43,000-Series" Cutters .....	23
Arbors for Machine Tools .....	24
Sharpening Machine .....	25
RotaCut™ Sheet Metal Cutters .....	26
Step Drills/Extended Reach Cutters .....	27
Holcutter™ Sheet Metal Cutters .....	28
Paint Shaker/P.O.P. ....	29

**Electro-Hydraulic Hole Punchers**

Punch Comparison Chart .....	30
76000 .....	31
75002.5PR .....	32
75003A .....	33
75004PR .....	33
75005 .....	34
75006 .....	34
Punches and Dies .....	35-40
Warranty Service Centers .....	41
Other Helpful Information .....	42-43



**NEW!**

# MAGNETIC DRILL PILOT LIGHT

From low light to no light, never worry about seeing where you are drilling again. The LED Pilot Light is a standard feature on new models of Hougen magnetic drills.


Pat. Pending

## MORE NEW FEATURES



### Multi-Speed Gear Boxes

Improves tool life and torque



### Two Stage Magnet

Engages full power when motor is on



### Hex Wrench Holder

Never look for your wrench again



### D-Ring Safety Chain Connector

Securely chain the drill to the work piece



### Integrated Coolant Bottle


Provides thru-the-tool coolant to the cutter

## THREE NEW MODELS

**HMD905**  
TWO SPEED




**HMD927**  
TWO SPEED  
POWER FEED

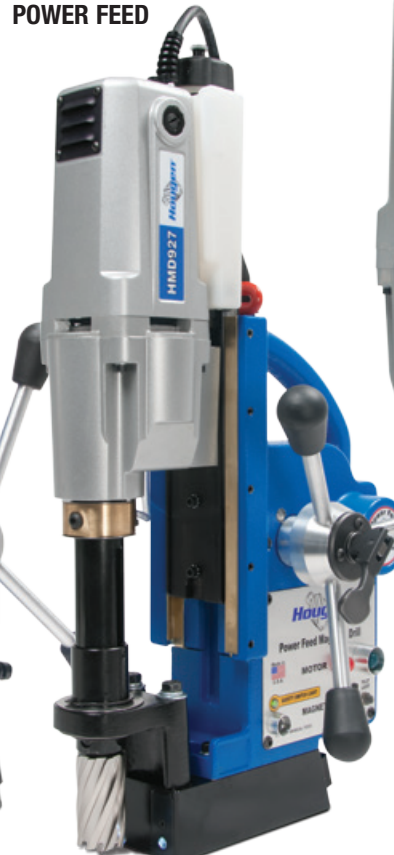

**HMD917**  
TWO SPEED



# HOUGEN® PORTABLE MAGNETIC DRILLS



## HMD115 ULTRA LOW PROFILE

**Ultra Low Profile right angle drill for extreme tight spots.**

- Ultra Low Profile - fits in the tightest of spots. Only 6-11/16" (170mm) height
- Lightweight at only 21.3 lbs (9.7 kg)
- Patented quill feed arbor for smooth cuts and minimal maintenance
- Uses RotaLoc™ cutters which requires no tools for installation or removal
- Positive slug ejection
- High torque gearing
- Feed handles lock for easy maneuverability
- Ratchet or wrench can be used in place of handles
- Rear mounted controls
- Carrying case included
- One year warranty
- Optional carrying handle part no. 07021



Patented



### HMD115 SPECIFICATIONS

Electrical System	115V, 50/60 Hz - 8A, 960W 230V, 50/60 Hz - 4A, 960W	
Motor	7A (115V), 3.5A (230V) 450 RPM	
Diameter	1/2" - 1-1/16" (12mm - 27mm)	
Depth	3/4" (19mm)	
Cutter/Mount	RotaLoc™ with push & turn style shank	
Dimensions	6-11/16" H x 8-1/2" W x 11-5/8" L (170mm H x 216mm W x 295mm L)	
Base	4" W x 7" L (102mm W x 178mm L)	
Magnet	1" Plate (25mm)	Dead Lift 2080 lb. (944 kg) Drillpoint Breakaway 849 lb. (385 kg)
	3/8" Plate (9.5mm)	1283 lb. (582 kg) 535 lb. (243 kg)
Weight	21.3 lb. (9.7 kg) • Shipping 31 lb (14.1 kg)	

### MODELS & PART NO.

Part No.	Description	Voltage	CSA	Special Plug
0115101	HMD115	115V	X	
0115201	HMD115	230V		
0115301	HMD115	230V		Type I
0115401	HMD115	230V		No Plug

- All drills include: carrying case, Slick-Stik™ lubricant, & safety strap.





# HOUGEN® PORTABLE MAGNETIC DRILLS



Patented



Made in U.S.A.

## HMD150 LOW PROFILE

**Low Profile lightweight right angle drill with large capacity.**

- Lightweight at only 22.7 lbs (10.3 kg)
- Patented quill feed arbor for smooth cuts and minimal maintenance
- Uses RotaLoc™ & RotaLoc Plus™ cutters which requires no tools for installation or removal
- Positive slug ejection
- High torque gearing
- Lift detector safety system
- Feed handle switches easily from side to side
- Ratchet or wrench can be used in place of feed handle
- Rear mounted controls
- Ergonomic carrying handle
- Carrying case included
- One year warranty

### HMD150 SPECIFICATIONS

Electrical System	120V, 50/60 Hz - 9A, 1035W 230V, 50/60 Hz - 4.5A, 1035W		
Motor	8A (120V), 4A (230V) 450 RPM		
Diameter	7/16" - 1-3/8" (12mm - 35mm)		
Depth	1" (25mm)		
Cutter/Mount	RotaLoc™ and RotaLoc Plus™ with push & turn style shank		
Dimensions	7-13/16" H x 6-1/2" W x 11-11/16" L (198mm H x 165mm W x 297mm L)		
	Base	4" W x 7" L (102mm W x 178mm L)	
Magnet	1" Plate (25mm)	Dead Lift 2165 lb. (982 kg)	Drillpoint Breakaway 735 lb. (333 kg)
	3/8" Plate (9.5mm)	1200 lb. (544 kg)	500 lb. (227 kg)
Weight	22.7 lb. (10.3 kg) • Shipping 32 lb (14.5 kg)		

### MODELS & PART NO.

Part No.	Description	Voltage	CSA	Special Plug
0150101	HMD150	120V	X	
0150201	HMD150	230V		
0150301	HMD150	230V		Type I
0150401	HMD150	230V		No Plug

- All drills include: carrying case, carrying handle, Slick-Stik™ lubricant, & safety strap.

Use a ratchet or wrench in tight areas



Includes carrying handle



# HOUGEN® PORTABLE MAGNETIC DRILLS

## HMD904

**The drill of choice for fabrication. Lightweight, powerful, & versatile.**

- Completely redesigned with additional features
- Pilot light for low light conditions and greater hole accuracy
- New - Two stage magnet. Engages full power when motor is turned on
- New Housing and slot drive arbor system
- Positive slug ejection
- Many accessories are available for a portable machine shop including: drill chucks, tapping, countersink, and more...
- Lift detector safety system
- Gravity fed coolant system
- Carrying case included
- One year warranty

**Swivel Base adds even greater versatility:**

- Precisely line up your pilot with the holes center location
- One stroke lock and unlock handle
- Great for horizontal, overhead, tight areas, and getting out over another piece of steel



Pat. Pending

### MODELS & PART NO.

Part No.	Description	Voltage	Coolant Bottle	Swivel	Cutter Kit	Special Plug
0904101	HMD904	115V				
0904102	HMD904	115V	X			
0904103	HMD904	115V		X		
0904104	HMD904	115V	X	X		
0904105	Fabricator's Kit	115V	X		12002	
0904108	Fabricator's Kit	115V	X		12004	
0904109	Fabricator's Kit	115V	X	X	12002	
0904110	Fabricator's Kit	115V	X	X	12004	
0904201	HMD904	230V				
0904202	HMD904	230V	X			
0904203	HMD904	230V		X		
0904204	HMD904	230V	X	X		
0904205	Fabricator's Kit	230V	X		12002	
0904208	Fabricator's Kit	230V	X		12004	
0904209	Fabricator's Kit	230V	X	X	12002	
0904210	Fabricator's Kit	230V	X	X	12004	
0904301	HMD904	230V				Type I
0904302	HMD904	230V	X			Type I
0904303	HMD904	230V		X		Type I
0904304	HMD904	230V	X	X		Type I
0904308	Fabricator's Kit	230V	X		12004	Type I
0904310	Fabricator's Kit	230V	X	X	12004	Type I

- All drills include: carrying case, pint of coolant, safety chain, hex wrenches but do not include an on/off switch for the pilot light.

- Fabricator's Kit Includes: drill, 1/2" drill chuck, adapter, & "12,000-Series" Cutter Kit.

**ADDITIONAL 230V MODELS ARE AVAILABLE, VISIT WWW.HOUGEN.COM FOR THE FULL LIST OF PART NUMBERS**

### HMD904 SPECIFICATIONS

<b>Electrical System</b>	115V, 50/60 Hz - 9A, 1035W		
	230V, 50/60 Hz - 4.5A, 1035W		
<b>Motor</b>	8A, 920W (115V), 4A, 920W (230V) 450 RPM		
<b>Diameter</b>	7/16" - 1-1/2" (12mm - 38mm)		
<b>Depth</b>	2" (50mm)		
<b>Cutter/Mount</b>	"12,000-Series", Copperhead™ and Fusion™ cutters, 3/4" (19mm) shank		
<b>Twist Drill Capacity</b>	1/2" w/ drill chuck		
<b>Tapping Capacity</b>	1/2" w/ tapping unit		
<b>Dimensions</b>	19-5/8" H x 7-3/4" W x 11-5/8" L (499mm H x 197mm W x 295mm L)		
<b>Swivel Area</b>	1-1/8" W x 1-3/8" L (28.5mm W x 34.9mm L)		
<b>Magnet</b>	<b>Base</b>	3-1/8" W x 6-9/16" L (79mm W x 167mm L)	
	<b>1" Plate (25mm)</b>	Dead Lift 1750 lb. (794 kg)	Drillpoint Breakaway 995 lb. (433 kg)
	<b>3/8" Plate (9.5mm)</b>	1310 lb. (594 kg)	710 lb. (322 kg)
<b>Swivel Magnet</b>	<b>1" Plate (25mm)</b>	Dead Lift 1340 lb. (608 kg)	Drillpoint Breakaway Forward - 695 lb. (315 kg) Back - 835 lb. (379 kg)
	<b>3/8" Plate (9.5mm)</b>	1015 lb. (460 kg)	Forward - 503 lb. (228 kg) Back - 605 lb. (274 kg)
<b>Weight</b>	28.9 lb. (13.1 kg) • Shipping 43 lb. (19.5 kg)		
<b>Weight (Swivel)</b>	31.9 lb. (14.5 kg) • Shipping 45 lb. (20.4 kg)		



# HOUGEN® PORTABLE MAGNETIC DRILLS



## HMD905

### Larger Motor with two speeds adds increased strength and versatility.

- Powerful high torque Hougen motor and gears
- Two speed gear box - 250 & 450 RPM
- Pilot light for low light conditions and greater hole accuracy
- Two stage magnet. Engages full power when motor is turned on
- Available with or without the swivel base
- Positive slug ejection
- Many accessories are available to turn your drill into a portable machine shop including: drill chucks, tapping, countersink, and more...
- Lift detector safety system
- Integrated gravity fed coolant bottle
- Carrying case included
- One year warranty

### Swivel Base adds even greater versatility:

- Precisely line up your pilot with the holes center location
- One stroke lock and unlock handle
- Great for horizontal, overhead, tight areas, and getting out over another piece of steel

## MODELS & PART NO.

Part No.	Description	Voltage	Coolant Bottle	Swivel	Cutter Kit	Special Plug
0905102	HMD905	115V	X			
0905104	HMD905	115V	X	X		
0905105	Fabricator's Kit	115V	X		12002	
0905108	Fabricator's Kit	115V	X		12004	
0905109	Fabricator's Kit	115V	X	X	12002	
0905110	Fabricator's Kit	115V	X	X	12004	
0905202	HMD905	230V	X			
0905204	HMD905	230V	X	X		
0905205	Fabricator's Kit	230V	X		12002	
0905208	Fabricator's Kit	230V	X		12004	
0905209	Fabricator's Kit	230V	X	X	12002	
0905210	Fabricator's Kit	230V	X	X	12004	
0905302	HMD905	230V	X			Type I
0905304	HMD905	230V	X	X		Type I
0905308	Fabricator's Kit	230V	X		12004	Type I
0905310	Fabricator's Kit	230V	X	X	12004	Type I
0905402	HMD905	230V	X			No Plug
0905404	HMD905	230V	X	X		No Plug
0905405	Fabricator's Kit	230V	X		12002	No Plug
0905408	Fabricator's Kit	230V	X		12004	No Plug
0905409	Fabricator's Kit	230V	X	X	12002	No Plug
0905410	Fabricator's Kit	230V	X	X	12004	No Plug

- All drills include: carrying case, pint of coolant, safety chain, hex wrenches, & on/off switch for the pilot light.

- Fabricator's Kit Includes: drill, 1/2" drill chuck, adapter, & "12,000-Series" Cutter Kit.



Pat. Pending

## HMD905 SPECIFICATIONS

<b>Electrical System</b>	115V, 50/60 Hz - 10A, 1150W 230V, 50/60 Hz - 5A, 1150W		
<b>Motor</b>	9A, 1035W (115V), 4.5A, 1035W (230V) 250/450 RPM		
<b>Diameter</b>	7/16" - 1-5/8" (12mm - 41mm)		
<b>Depth</b>	2" (50mm)		
<b>Cutter/Mount</b>	"12,000-Series", Copperhead™ and Fusion™ cutters, 3/4" (19mm) shank		
<b>Twist Drill Capacity</b>	1/2" w/ drill chuck		
<b>Tapping Capacity</b>	1/2" w/ tapping unit		
<b>Dimensions</b>	22-13/16" H x 7-11/16" W x 11-3/4" L (579mm H x 195mm W x 299mm L)		
<b>Swivel Area</b>	1-1/8" W x 1-3/8" L (28.5mm W x 34.9mm L)		
	<b>Base</b>	3-1/8" W x 6-9/16" L (79mm W x 167mm L)	
<b>Magnet</b>	<b>1" Plate (25mm)</b>	Dead Lift 1750 lb. (794 kg)	Drillpoint Breakaway 995 lb. (433 kg)
	<b>3/8" Plate (9.5mm)</b>	1310 lb. (594 kg)	710 lb. (322 kg)
<b>Swivel Magnet</b>	<b>1" Plate (25mm)</b>	Dead Lift 1340 lb. (608 kg)	Drillpoint Breakaway Forward - 695 lb. (315 kg) Back - 835 lb. (379 kg)
	<b>3/8" Plate (9.5mm)</b>	1015 lb. (460 kg)	Forward - 503 lb. (228 kg) Back - 605 lb. (274 kg)
<b>Weight</b>	35 lb. (15.9 kg) • Shipping 52 lb (23.6 kg)		
<b>Weight (Swivel)</b>	38 lb. (17.2 kg) • Shipping 55 lb (24.9 kg)		

# HOUGEN® PORTABLE MAGNETIC DRILLS



## HMD927 POWER FEED

**Power Feed - Saves time and money with less effort.**

- Powerful high torque Hougén motor and gears
- Two speed gear box - 250 & 450 RPM
- Pilot light for low light conditions and greater hole accuracy
- Two stage magnet. Engages full power when motor is turned on
- Available with or without the swivel base
- Smart technology optimizes feed rate for increased tool life and excellent hole quality
- Single handle to engage power feed system
- Positive slug ejection
- Lift detector safety system
- Side mounted controls
- Gravity fed coolant bottle included
- Many accessories are available (manual mode only)
- Selectable manual/power feed mode
- One year warranty

### Swivel Base adds even greater versatility:

- Precisely line up your pilot with the holes center location
- One stroke lock and unlock handle
- Great for horizontal, overhead, tight areas, and getting out over another piece of steel



Pat. Pending

## MODELS & PART NO.

Part No.	Description	Voltage	Coolant Bottle	Swivel	Special Plug
0927102	HMD927	115V	X		
0927104	HMD927	115V	X	X	
0927202	HMD927	230V	X		
0927204	HMD927	230V	X	X	
0927302	HMD927	230V	X		Type I
0927304	HMD927	230V	X	X	Type I
0927402	HMD927	230V	X		No Plug
0927404	HMD927	230V	X	X	No Plug

- All drills include: pint of coolant, safety chain, hex wrenches & on/off switch for the pilot light.

## HMD927 SPECIFICATIONS

<b>Electrical System</b>	115V, 50/60 Hz - 10A, 1150W 230V, 50/60 Hz - 5A, 1150W		
<b>Motor</b>	9A, 1035W (115V), 4.5A, 1035W (230V) 250/450 RPM		
<b>Diameter</b>	7/16" - 1-5/8" (12mm - 41mm)		
<b>Depth</b>	2" (50mm)		
<b>Cutter/Mount</b>	"12,000-Series", Copperhead™ and Fusion™ cutters, 3/4" (19mm) shank		
<b>Dimensions</b>	22-13/16" H x 8-3/4" W x 14-11/16" L (579mm H x 222mm W x 373mm L)		
<b>Swivel Area</b>	1-1/8" W x 1-3/8" L (28.5mm W x 34.9mm L)		
	<b>Base</b>	3-1/8" W x 6-9/16" L (79mm W x 167mm L)	
<b>Magnet</b>	<b>1" Plate (25mm)</b>	Dead Lift 1750 lb. (794 kg)	Drillpoint Breakaway 955 lb. (433 kg)
	<b>3/8" Plate (9.5mm)</b>	1310 lb. (594 kg)	710 lb. (322 kg)
<b>Swivel Magnet</b>	<b>1" Plate (25mm)</b>	Dead Lift 1340 lb. (608 kg)	Drillpoint Breakaway Forward - 695 lb. (315 kg) Back - 835 lb. (379 kg)
	<b>3/8" Plate (9.5mm)</b>	1015 lb. (460 kg)	Forward - 503 lb. (228 kg) Back - 605 lb. (274 kg)
<b>Weight</b>	43 lb. (19.5 kg) • Shipping 56 lb. (25.4 kg)		
<b>Weight (Swivel)</b>	46 lb. (25.4 kg) • Shipping 59 lb. (26.8 kg)		



# HOUGEN® PORTABLE MAGNETIC DRILLS


## HMD917

**Powerful workhorse with a large capacity and built in versatility.**

- Powerful high torque Hougen motor and gears
- Two speed gear box - 250 & 450 RPM
- Pilot light for low light conditions and greater hole accuracy
- Two stage magnet. Engages full power when motor is turned on
- Available with or without the swivel base
- Positive slug ejection
- Many accessories are available to turn your drill into a portable machine shop including: drill chucks, tapping, countersink, and more...
- Feed handles quickly change from side to side
- Lift detector safety system
- Integrated gravity fed coolant bottle
- Carrying case included
- One year warranty

**Swivel Base adds even greater versatility:**

- Precisely line up your pilot with the holes center location
- One stroke lock and unlock handle
- Great for horizontal, overhead, tight areas, and getting out over another piece of steel



Pat. Pending



### MODELS & PART NO.

Part No.	Description	Voltage	Coolant Bottle	Swivel	Cutter Kit	Special Plug
0917102	HMD917	115V	X			
0917104	HMD917	115V	X	X		
0917105	Fabricator's Kit	115V	X		12002	
0917108	Fabricator's Kit	115V	X		12004	
0917109	Fabricator's Kit	115V	X	X	12002	
0917110	Fabricator's Kit	115V	X	X	12004	
0917202	HMD917	230V	X			
0917204	HMD917	230V	X	X		
0917205	Fabricator's Kit	230V	X		12002	
0917208	Fabricator's Kit	230V	X		12004	
0917209	Fabricator's Kit	230V	X	X	12002	
0917210	Fabricator's Kit	230V	X	X	12004	
0917302	HMD917	230V	X			Type I
0917304	HMD917	230V	X	X		Type I
0917308	Fabricator's Kit	230V	X		12004	Type I
0917310	Fabricator's Kit	230V	X	X	12004	Type I

- All drills include: carrying case, pint of coolant, safety chain, hex wrenches & on/off switch for the pilot light.


- Fabricator's Kit Includes: drill, 1/2" drill chuck, adapter, & "12,000-Series" Cutter Kit.

**ADDITIONAL 230V MODELS ARE AVAILABLE, VISIT WWW.HOUGEN.COM FOR THE FULL LIST OF PART NUMBERS**

### HMD917 SPECIFICATIONS

<b>Electrical System</b>	115V, 50/60 Hz - 13.5A, 1553W 230V, 50/60 Hz - 6.75A, 1553W		
<b>Motor</b>	12.5A, 1438W (115V), 6.25A, 1438W (230V) 250/450 RPM		
<b>Diameter</b>	7/16" - 2-3/8" (12mm - 60mm)		
<b>Depth</b>	3" (76mm)		
<b>Cutter/Mount</b>	"12,000-Series", Copperhead™ and Fusion™ cutters, 3/4" (19mm) shank		
<b>Twist Drill Capacity</b>	3/4" w/ drill chuck		
<b>Tapping Capacity</b>	3/4"-10 w/ tapping unit		
<b>Dimensions</b>	25-13/16" H x 8-3/16" W x 12-13/16" L (656mm H x 208mm W x 325mm L)		
<b>Swivel Area</b>	1-1/8" W x 1-3/8" L (28.5mm W x 34.9mm L)		
	<b>Base</b>	3-1/2" W x 7-3/4" L (89mm W x 197mm L)	
<b>Magnet</b>	<b>1" Plate (25mm)</b>	Dead Lift 2385 lb. (1082 kg)	Drillpoint Breakaway 1290 lb. (585 kg)
	<b>3/8" Plate (9.5mm)</b>	1635 lb. (742 kg)	825 lb. (374 kg)
<b>Swivel Magnet</b>	<b>1" Plate (25mm)</b>	Dead Lift 2480 lb. (1125 kg)	Drillpoint Breakaway For - 1043 lb. (473 kg) Back - 1218 lb. (552 kg)
	<b>3/8" Plate (9.5mm)</b>	1782 lb. (808 kg)	For - 796 lb. (361 kg) Back - 1067 lb. (484 kg)
<b>Weight</b>	46 lb (20.9 kg) • Shipping 63 lb (28.6 kg)		
<b>Weight (Swivel)</b>	50 lb. (29.9 kg) • Shipping 67 lb (31.8 kg)		

# HOUGEN® PORTABLE MAGNETIC DRILLS



Patented



## HMD505 & HMD508

**A rugged, high powered drill for fabrication and high production environments.**

- Two speed gear box - 250 & 450 RPM (HMD505) or higher speed 450 & 750 RPM (HMD508)
- Positive slug ejection
- Patented quill feed arbor for smooth cuts and minimal maintenance
- Two stage magnet. Engages full power when motor is turned on
- Feed handles quickly change from side to side
- Lift detector safety system
- Rear mounted controls
- Coolant bottle included
- Optional pressurized coolant system available
- With coolant bottle and carrying handle removed, drill becomes only 15" (381mm) high
- Carrying case included
- One year warranty

### MODELS & PART NO.

Part No.	Description	Voltage	RPM	Coolant Bottle	Special Plug
0505102	HMD505	115V	250/450	X	
0505202	HMD505	230V	250/450	X	
0505302	HMD505	230V	250/450	X	Type I
0505402	HMD505	230V	250/450	X	No Plug
0508102	HMD508	115V	450/750	X	
0508202	HMD508	230V	450/750	X	
0508302	HMD508	230V	450/750	X	Type I
0508402	HMD508	230V	450/750	X	No Plug

- All drills include: carrying case, pint of coolant, hex wrenches, & safety chain.

**Quill Feed Arbor for smooth cuts**



**Two speed gear box for increased tool life**



### HMD505 & HMD508 SPECIFICATIONS

<b>Electrical System</b>	115V, 50/60 Hz - 15A, 1725W 230V, 50/60 Hz - 7.5A, 1725W		
<b>Motor</b>	14A (115V), 7A (230V) 250/450 RPM or 450/750 RPM		
<b>Diameter</b>	7/16" - 2-3/8" (12mm - 60mm)		
<b>Depth</b>	3" (76mm)		
<b>Cutter/Mount</b>	"12,000-Series", Copperhead™ and Fusion™ cutters, 3/4" (19mm) shank		
<b>Dimensions</b>	20" H x 4-3/4" W x 10-3/4" L (508mm H x 121mm W x 273mm L)		
	<b>Base</b>	4" W x 8" L (102mm W x 203mm L)	
<b>Magnet</b>	<b>1" Plate (25mm)</b>	Dead Lift 2560 lb. (1161 kg)	Drillpoint Breakaway 1080 lb. (490 kg)
	<b>3/8" Plate (9.5mm)</b>	1550 lb. (703 kg)	820 lb. (372 kg)
		45 lb. (20.4 kg) • Shipping 57 lb (25.9 kg)	

Optional pressurized coolant system increases productivity. Part No. 24140





# HOUGEN® PORTABLE MAGNETIC DRILLS

## HMD933

**Industrial Duty drill for large deep holes with four speed gearing.**

- Powerful motor with two speed gear box
- Interchangeable gears for up to four speeds
- Uses Industrial Duty "42/43,000-Series" Cutters
- Can use "12,000-Series" Cutters with included adapter 40040 (02386 optional adapter)
- Positive slug ejection
- Feed handles quickly change from side to side
- Integrated coolant system
- Increased magnet holding power with impactor points
- Lift detector safety system
- Integrated motor/gearbox design with guide rails for a rigid compact design
- Minimal maintenance requirements
- One year warranty



 Made in U.S.A.

**NEW!**

### MODELS & PART NO.

Part No.	Description	Voltage	Special Plug
0933102	HMD933	115V	
0933202	HMD933	230V	
0933302	HMD933	230V	Type I
0933402	HMD933	230V	No Plug

- All drills include: pint of coolant, hex wrenches, adapter for "12,000-Series" cutters, handle & safety chain.

### HMD933 SPECIFICATIONS

<b>Electrical System</b>	115V, 50/60 Hz - 13.5A, 1553W
	230V, 50/60 Hz - 6.75A, 1553W
<b>Motor</b>	12.5A, 1438W (115V), 6.25A, 1438 (230V) 70/120/200/332 RPM
<b>Diameter</b>	5/8" - 3-1/16" (16mm - 77mm)
<b>Depth</b>	3" (76mm)
<b>Cutter/Mount</b>	Industrial Duty "42/43,000-Series" 1-1/4" shank
<b>Dimensions</b>	26-1/4" H x 10" W x 17-3/4" L (667mm H x 254mm W x 451mm L)
	<b>Base</b> 5" W x 7" L (127mm W x 178mm L)
<b>Magnet</b>	<b>1" Plate (25mm)</b> Dead Lift 2565 lb. (1163 kg) Drillpoint Breakaway 1390 lb. (631 kg)
	<b>3/8" Plate (9.5mm)</b> 1080 lb. (490 kg) 470 lb. (213 kg)
<b>Weight</b>	72 lb. (32.6 kg) • Shipping 94 lb (42.6 kg)

### HMD933 INCLUDES THE FOLLOWING CUTTER RPM

Cutter RPM	Part No. (Number Teeth Per Gear)	
	Shaft A	Shaft B
<b>Motor High Speed</b>		
120	40012 (18)	40016 (30)
332	40016 (30)	40012 (18)
<b>Motor Low Speed</b>		
70	40012 (18)	40016 (30)
200	40016 (30)	40012 (18)




# PORTABLE MAGNETIC DRILLS

		HMD115	HMD150	HMD904	HMD905	HMD927	HMD917	HMD505 / HMD508	HMD933
		Low Profile		Fabricating				Heavy Duty Drilling	
<b>Annular Cutters</b>	RotaLoc™	✓	✓	With Adapter	With Adapter	With Adapter	With Adapter	With Adapter	
	RotaLoc Plus™		✓	With Adapter	With Adapter	With Adapter	With Adapter	With Adapter	
	"12,000-Series"			✓	✓	✓	✓	✓	With Adapter (5/8" & Larger)
	Copperhead™ Carbide Tipped			✓	✓	✓	✓	✓	
	"42/43,000-Series"								✓
<b>Model Specifications</b>	Diameter Min./Max.	1/2" to 1-1/16" (12 - 27mm)	7/16" to 1-3/8" (12 - 35mm)	7/16" to 1-1/2" (12 - 38mm)	7/16" to 1-5/8" (12 - 41mm)	7/16" to 1-5/8" (12 - 41mm)	7/16" to 2-3/8" (12 - 60mm)	7/16" to 2-3/8" (12 - 60mm)	5/8" to 3-1/16" (16 - 77mm)
	Depth Max.	3/4" (19mm)	1" (25mm)	2" (50mm)	2" (50mm)	2" (50mm)	3" (76mm)	3" (76mm)	3" (76mm)
	Cutter Mounting	Bayonet Style	Bayonet Style	3/4" Double Flat	3/4" Double Flat	3/4" Double Flat	3/4" Double Flat	3/4" Double Flat	3/4" or 1-1/4" Weldon Shank
	No-Load R.P.M.	450	450	450	250 / 450	250 / 450	250 / 450	250 / 450 450 / 750	70/120 200/332
	Model Weight	21.3 lbs (9.7 kg)	22.7 lbs (10.3 kg)	28.9 lbs (13.1 kg)	35 lbs (15.9 kg)	43 lbs (19.5 kg)	46 lbs (20.9 kg)	45 lbs (20.4 kg)	72 lbs (32.6 kg)
	Thru-the-Tool Coolant			✓	✓	✓	✓	✓	✓
<b>Available Accessories</b>	Carrying Case Included	✓	✓	✓	✓		✓	✓	
	Swivel Base			Optional	Optional	Optional	Optional		
	Pipe Adapter			✓	✓	Manual Mode	✓	✓	Bracket Mount
	Tap Attachment			✓	✓	Manual Mode	✓		
	Vac-Pad™			✓	✓				
	Coolant Bottle			Optional	Included	Included	Included	Included	Included
	Countersink Kit			✓	✓	Manual Mode	✓	✓	With Adapter
	Twist Drill Adapter			✓	✓	Manual Mode	✓	✓	With Adapter
	Ratchet Drive	✓	✓	✓	✓			✓	
	Arbor Extender			✓	✓	Manual Mode	✓	✓	With Adapter
	Drill Chuck			✓	✓	Manual Mode	✓		
	RotaLoc™ Spindle Adapter			✓	✓	Manual Mode	✓	✓	



# HOUGEN® MAGNETIC DRILL ACCESSORIES

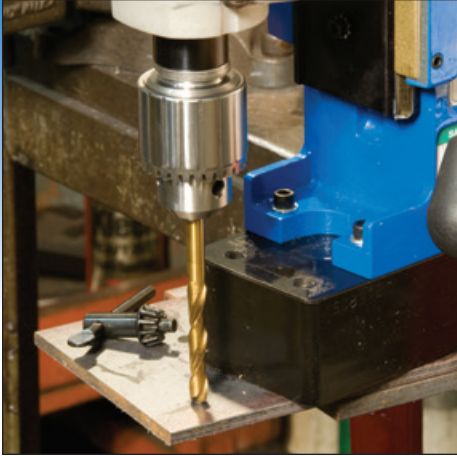

## DRILL CHUCKS

Part No.	Description
10731	1/2" Hougen Chuck with Key (HMD904, HMD905, HMD914, HMD917, HMD925 & HMD927)
10737	5/8" Hougen Chuck with Key (HMD914 & HMD917)
10732	1/2" Jacobs® Chuck with Key (HMD904, HMD905, HMD914, HMD917, HMD925 & HMD927)
10738	5/8" Jacobs® Chuck with Key (HMD914 & HMD917)
07930	Replacement key for 1/2" Chucks
07931	Replacement key for 5/8" Chucks

### Required Spindle Adapters:

Drill	Spindle Adapter
HMD904, 905 & 927 (Slot Drive)	08186
HMD917	08190
HMD904 & 925 (Hex Arbor)	05536
HMD904 & 925 (Threaded Arbor)	01829
HMD914	40341



## TWIST DRILL ADAPTER KIT

Part No.	Description
02608	Twist Drill Adapter
03835	1/2" Twist Drill Bit
03837	7/16" Twist Drill Bit
03839	3/8" Twist Drill Bit
03841	5/16" Twist Drill Bit
03843	1/4" Twist Drill Bit
03845	Twist Drill Adapter Kit

Makes using twist drills quick and easy. Fits most any mag drill that will fit a 3/4" two flat shank. Adapter accepts a modified 118° twist drill with a 1/4" flatted shank that secures in adapter with a set screw.



## 82° CARBIDE-INSERT COUNTERSINK KIT

Part No.	Description
12965	(1) 82° Countersink (double fluted) with carbide inserts, (4) Pilots - 9/16, 11/16, 13/16, 15/16", plus a Torx Wrench
12960	9/16" Pilot
12961	11/16" Pilot
12962	13/16" Pilot
12963	15/16" Pilot
12966	Countersink Ass'y w/Carbide Inserts
05465	Replacement Torx Wrench
05467	Carbide Inserts (10 pieces)
05779	Carbide Inserts Wear Resistant (10 pieces)

Countersink provides 82° chamfers on holes quickly and easily. Two types of carbide inserts are available depending upon material hardness.

- Use 05467 inserts on mild steel, cast steel & malleable iron.
- Use 05779 inserts on structural steel, stainless steel, harder steels & non-ferrous metals.



## TAPPING ATTACHMENT KITS


Part No.	Description
08177	For use with HMD904 & HMD905 (Slot Drive-includes adapter 08176)
08180	For use with HMD917 (Includes adapter 08179)
02463	For use with HMD904 (Threaded Drive)
05457	For use with HMD904 (Hex Drive-Includes 07339 adapter)
10937	For use with HMD914

### Required Collets for Tap Units:

Collets:	02495 for #6 thru 1/4" tap
	02496 for 1/4" thru 1/2" tap
Collets:	10807 for #10 thru 1/2" tap
	10808 for 1/2" thru 3/4" tap

Incorporates a planetary gear reverse with a 1:1 ratio. Reversing speed is equal to spindle speed so in-feed and out-feed of the unit can be employed without reversing motor direction.

# HOUGEN® MAGNETIC DRILL ACCESSORIES

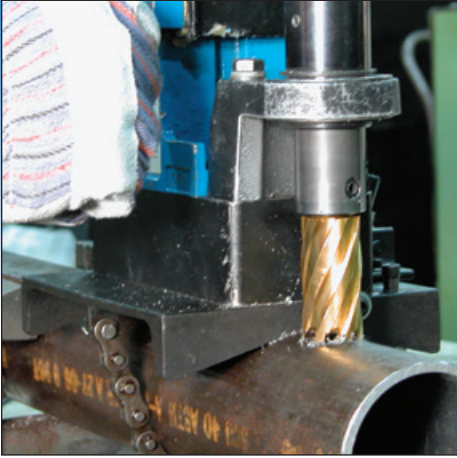

## PIPE ADAPTER KIT

Part No.	Description
02564*	Chain Mount for use with HMD904, HMD905, HMD914, HMD917 & HMD505/508
10726	Bracket Mount for use with HMD933 & HMD915

These kits let you drill pipe and tubing with a minimum 3" (76mm) diameter and some convex surfaces. Kits quickly attach to your Hougen® Magnetic Drill and positive non-slip positioning assures centered hole location.

\*Minimum 3" dia. schedule 160, maximum 12" dia. schedule 160.



## VAC-PAD™

Part No.	Description
05000	Vacuum Base Attachment

Vac-Pad™ works with the HMD904 & HMD905 on non-ferrous materials, diamond plate and materials with surface imperfections up to 3mm deep. Standard shop air provides 761 lbf surface holding power at 85 kpa. Safety switch shuts off drill motor if air pressure drops.

## SPINDLE ADAPTERS

Spindle adapters are required for some Hougen mag drill accessories.

Part No.	Description
01829	HMD904 Chuck Adapter (Old Style Threaded) (not shown)
02386	HMD933 & HMD915 3/4" Shank Adapter
05536	HMD904 & HMD925 Chuck Adapter (Hex Drive)
07339	HMD904 & HMD925 Tapping Adapter (Hex Drive)
08176	HMD904 & HMD905 Tapping Adapter (Slot Drive)

08179	HMD917 Tapping Adapter
08186	HMD904, HMD905 & HMD927 Chuck Adapter (Slot Drive)
08190	HMD917 Chuck Adapter
10851	1/2" Shank Cutter Adapter (not shown)
40040	HMD933 & HMD915 3/4" Weldon Adapter
40226	HMD914 Tap Adapter
40341	HMD914 Chuck Adapter





# HOUGEN® MAGNETIC DRILL ACCESSORIES



## ALTERNATIVE COOLANT SYSTEMS

Part No.	Description
24140	2 gal. pressurized bottle for use with HMD505 & HMD508

The pressurized coolant system for the HMD505/508 is used for production applications or when gravity feed coolant is not applicable.

## ROTALOC™ SPINDLE ADAPTER

Part No.	Description
17680	RotaLoc Adapter Assembly
04778	Replacement Adapter
04780	Replacement Pilot

With the RotaLoc™ Spindle Adapter you use RotaLoc™ or RotaLoc Plus™ Annular Cutters in virtually all Hougen® Portable Magnetic Drills or any other drill that also accepts "12,000-Series" Cutters.

## ARBOR EXTENDERS

Part No.	Description
10100	1" Arbor Extender Assembly
10200	2" Arbor Extender Assembly

When extended reach is necessary, Hougen offers 1" (25mm) and 2" (50mm) Arbor Extenders with a 1.310" (33.3mm) outside diameter that fit arbors using "12,000-Series" Cutters. Contact Hougen's Customer Service Department for more information about how the Arbor Extenders may help in your application.

## DRILL HANDLE

Part No.	Description
07021	Handle to fit Hougen Motors

Convenient handle helps you to carry and/or move your drill around. Fits HMD115 & HMD150.

## RATCHET DRIVES

Part No.	Description
02449	For use with Models HMD904 & HMD905
24154	For use with Models HMD505 & HMD508 (requires 1" socket)

With the feed handles removed the Ratchet Drive is easily installed, allowing use of a standard ratchet handle for drilling in confined areas. *(Ratchet not included)*

## LUBRICANT & CUTTING FLUID



RotaFoam™ Cutting Fluid works on all types of metals to extend tool life and improve hole finish. Blue foamy lubricant visually assures thorough coverage. *(No Air Shipments. Available only in the US & Canada)*

Part No.	Description
11747-12	(12) 17 oz. (482g) RotaFoam™ Lubricant <i>(Individual Can Part No. 11747*)</i>



Use with ferrous or non-ferrous materials. RotaMagic™ Concentrated Cutting Fluid is water soluble and yields a 10:1 ratio when mixed with water. *(Biodegradable & Non-Toxic)*

Slick-Stik™ is softer than other stick lubricants for easy application, superior adhesion to the tool, assuring thorough coverage. Specially formulated for use with "12,000-Series" Cutters. *(Non-Toxic)*



Part No.	Description
11746-12	(12) 1.68 oz. (48g) Slick-Stik™ Lubricant <i>(Individual Stick Part No. 11746*)</i>
11746-24	(24) 1.68 oz. (48g) Slick-Stik™ Lubricant in display box
11745-6	(6) 16 oz. (454g) Slick-Stik™ Lubricant <i>(Individual Stick Part No. 11745*)</i>

Part No.	Description
11741-12	(12) 1 Pint (.47L) Bottles - makes 1 pint each, 12 pints total <i>(Individual Pint Part No. 11741*)</i>
11742-4	(4) 1 Gallon (3.8L) Bottles - makes 11 gallons (41.6L) each, 44 gallons (167.6L) total <i>(Individual Gallon Part No. 11742*)</i>
11743	(1) 5 Gallon Pail (18.9L) - makes 55 gallons (208L) total
11744	(1) 55 Gallon Drum (208L) - Makes a lot of coolant!

*\*Note: Individual products are not for distributor purchase.*




Slick Stik™ and RotaMagic™ are environmentally friendly and do not contain harmful ingredients as do many lubricants.

## HOUGEN® CUTTER COMPARISON CHART

										
Tool Series:	Rotacut™	Extended Reach	Holcutter™	Carbide Holcutter™	Rotaloc™	Rotaloc Plus™	"12,000-Series"	Copperhead™	"42/43,000"	
Diameter Range Min. / Max.	1/4" to 1-1/2" (6mm - 25mm)	3/8" to 9/16" (1/4" (6.4mm))	1/8" (3.2mm) to 3"	1/16" to 3"	1/2" to 1-1/16" (12mm - 27mm)	7/16" to 1-3/8" (12mm - 35mm)	7/16" to 2-3/8" (12mm - 60mm)	9/16" to 2" (14mm - 60mm)	3/4" to 3-1/16"	
Max. Depth of Cut	1/4" to 1/2" (6.4mm - 12.7mm)	1/4" (6.4mm)	1/8" (3.2mm)	1/8" (3.2mm)	3/4" - (19mm) Stack Geometry	1" - (25mm)	1" to 6" (25mm to 152mm)	1" to 4" (25mm to 102mm)	2" or 3" (50mm or 76mm)	
Mounting	3/8" or 1/2" Triple Flat Shank	3/8" Triple Flat Shank	3/8" Triple Flat Shank	3/8" or 1/2" Triple Flat Shank	Bayonet Style	Bayonet Style	3/4" Double Flat or Fusion™ Shank	3/4" Double Flat or Fusion™ Shank	3/4" Weldon or 1-1/4" Weldon	
Cutter Material(s) Available	M2 HSS	M2 HSS	M2 HSS	Carbide Tip	M42 HSS	M2 HSS	M2 HSS, M2 TIN Coat, or M42 TIN	Carbide Tip	M2 HSS or M2 TIN Coat	
Can be Resharpened	===== Disposable =====									
Available Grind Down (Within Limits)										
Max. Application Hardness Rating	275 BHN (28.5 HRC)	275 BHN (28.5 HRC)	275 BHN (28.5 HRC)	450 BHN (47.2 HRC)	350 BHN (37.7 HRC)	275 BHN (28.5 HRC)	275 BHN (28.5 HRC)	450 BHN (47.2 HRC)	275 BHN (28.5 HRC)	
Recommended Lubrication	Slick-Stik™	Slick-Stik™	Slick-Stik™	Slick-Stik™	Slick-Stik™	Slick-Stik™	Rotamagic™	Rotamagic™	Rotamagic™	
Aluminum	===== High RPM & Fast Feed Rates Suggested =====									
Mild Steel										
Harder Steel		Good			Better	Good	Standard - Good TIN - Better		Standard - Good TIN - Better	
Stainless Steel	Good		Recommend Speed Reducer		Good		TIN Coat or Premium Recommended		TIN Coat Recommended	



# HOUGEN® "12,000-SERIES" CUTTERS - SIMPLY THE BEST

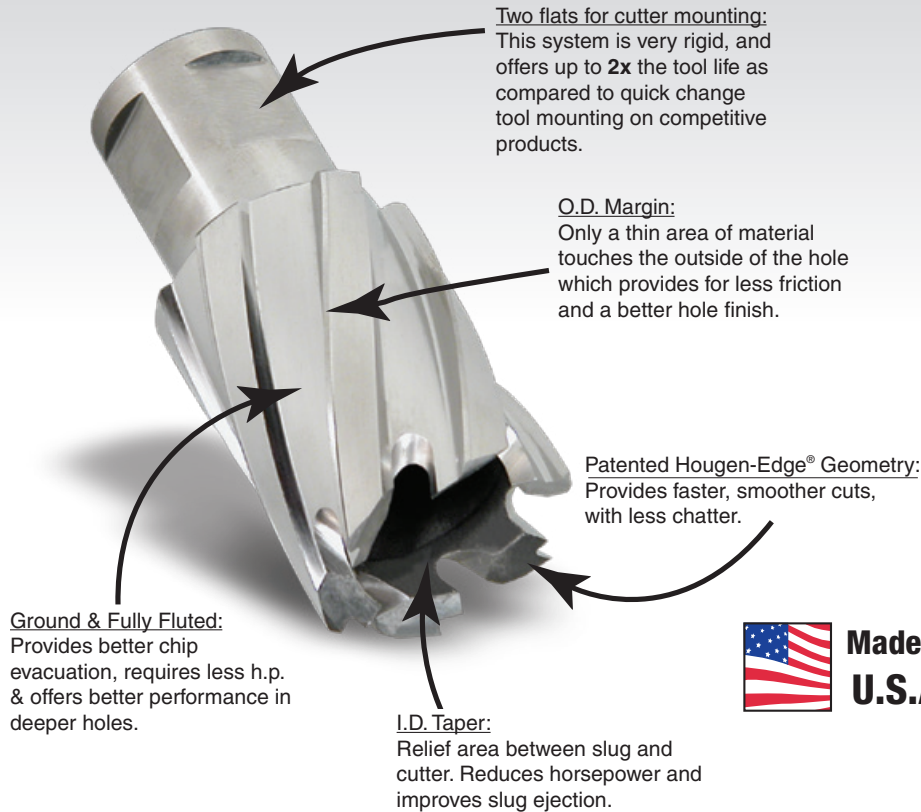

**Two flats for cutter mounting:**  
This system is very rigid, and offers up to **2x** the tool life as compared to quick change tool mounting on competitive products.

**O.D. Margin:**  
Only a thin area of material touches the outside of the hole which provides for less friction and a better hole finish.

**Patented Hougen-Edge® Geometry:**  
Provides faster, smoother cuts, with less chatter.


**Ground & Fully Fluted:**  
Provides better chip evacuation, requires less h.p. & offers better performance in deeper holes.

**I.D. Taper:**  
Relief area between slug and cutter. Reduces horsepower and improves slug ejection.




**Made in U.S.A.**

Hougen "12,000-Series" cutters were the original annular cutters invented over 35 years ago. With the most features of any annular cutter, "12,000-Series" cutters provide the best performance in the largest variety of materials. Compared to traditional tooling (twist drills, etc.) "12,000-Series" cutters can multiply your cutting speed by up to 3 times. And you get longer tool life, a more accurate hole, a better finish, with no burrs. Hougen cutters maximize feed rates because up to 10 cutting edges distribute the cutting load evenly. "12,000-Series" cutters convert a smaller area to chips, requiring less horsepower and thrust. The Hougen-Edge® feature is a patented tooth geometry that provides long tool life, less chatter, and extended resharpenability. The slug also offers a higher scrap value than loose chips.

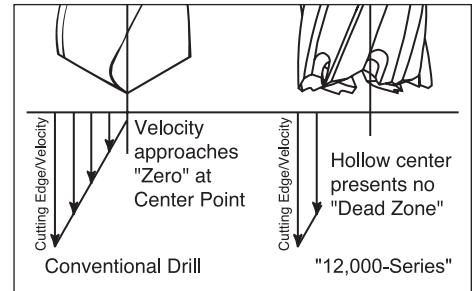

## Why use Stack-Cut Geometry?

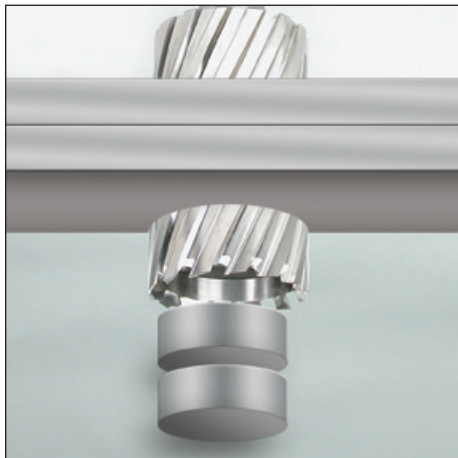

Hougen "12,000-Series" Annular Cutters with a Stack-Cut tooth geometry must be used whenever two or more plates are being drilled simultaneously. When drilling multiple pieces with traditional cutters, after the first piece is drilled, you need to stop and remove the slug before continuing on thru the second piece. Not a problem with stack cutters. Drill straight thru without stopping.

Many sizes of "12,000-Series" cutters are available from stock with stack cut geometry. All sizes are available by special request with stack-cut geometry.

Stack-Cut\* and Flat Bottom Grooving Tooth Geometry is available on the following Series of Cutters:

- "12,000-Series"
- "42/43,000-Series"
- "22/23,000-Series"
- RotaLoc Plus™

Hougen's Technical Service Department should be contacted whenever special tooth geometry and applications will be necessary.

*\*NOTE: Stack-Cut geometry is a standard feature of RotaLoc™ Cutters.*

## Carbide Cutters



Copperhead™ Carbide tipped cutters are premium tools with unique Hougen features. Designed for harder, rough, rusted, or more abrasive materials, but offer excellent performance in mild and structural steel applications.

These cutters feature a full length flute to pull chips out when deep in the hole. A thinner cutter wall improves cutting speed, while special Hougen tooth geometry optimizes cutter life and hole finish. Plus they now are available with two different shanks: the standard two flat 3/4" shank and the Fusion style shank that fits Hougen mag drills and competitive tool-less arbors.

# HOUGEN® "12,000-SERIES" ANNULAR CUTTERS

For use with Hogen® Portable Magnetic Drills and many competitive models on materials up to 275 BHN (28.5 HRC). They are made of hardened M2 high speed steel and are precision ground for excellent performance throughout the cut and long tool life. They require less horsepower and thrust to cut, and last much longer than traditional holemaking methods. "12,000-Series" cutters have a 3/4" diameter double-flatted shank. Modified end tooth geometry is also available for drilling in stacked plate applications. For extended tool life and lower cost per hole "12,000-Series" Cutters are resharpenable.



 Made in U.S.A.

Cutter Dia. (Inches)	Decimal Equivalent	Part No.		
		1" D.O.C.	2" D.O.C.	3" D.O.C.
Use with Pilot		10531	10532	
7/16	.4375	12114	12214	----
1/2	.5000	12116	12216	----
9/16	.5625	12118	12218	----
Use with Pilot		10527	10528	24131
5/8	.6250	12120	12220	----
11/16	.6875	12122	12222	----
3/4	.7500	12124	12224	3-12224
13/16	.8125	12126	12226	3-12226
7/8	.8750	12128	12228	3-12228
15/16	.9375	12130	12230	3-12230
1	1.0000	12132	12232	3-12232
1-1/16	1.0625	12134	12234	3-12234
1-1/8	1.1250	12136	12236	3-12236
1-3/16	1.1875	12138	12238	3-12238
1-1/4	1.2500	12140	12240	3-12240
1-5/16	1.3125	12142	12242	3-12242
1-3/8	1.3750	12144	12244	3-12244
1-7/16	1.4375	12146	12246	3-12246
1-1/2	1.5000	12148	12248	3-12248
1-9/16	1.5625	12150	12250	3-12250
1-5/8	1.6250	12152	12252	3-12252
1-11/16	1.6875	12154	12254	3-12254
1-3/4	1.7500	12156	12256	3-12256
1-13/16	1.8125	12158	12258	3-12258
1-7/8	1.8750	12160	12260	3-12260
1-15/16	1.9375	12162	12262	3-12262
2	2.0000	12164	12264	3-12264
2-1/16	2.0625	----	12266	3-12266
2-1/8	2.1250	----	12268	3-12268
2-3/16	2.1875	----	12270	3-12270
2-1/4	2.2500	----	12272	3-12272
2-5/16	2.3125	----	12274	3-12274
2-3/8	2.3750	----	12276	3-12276


All Cutters are available with **stack geometry**.  
To order: add 'S' to end of part no. ie...12226S.  
(Some sizes may take 7-10 days. Call for availability).

Cutter Dia. (Metric)	Decimal Equivalent	Part No.		
		25mm D.O.C.	50mm D.O.C.	76mm D.O.C.
Use with Pilot		10531	10532	
12mm	.4724	12312	12412	----
13mm	.5118	12313	12413	----
14mm	.5512	12314	12414	----
15mm	.5906	12315	12415	----
Use with Pilot		10527	10528	24131
16mm	.6299	12316	12416	----
17mm	.6693	12317	12417	----
18mm	.7087	12318	12418	----
19mm	.7480	12319	12419	12519
20mm	.7874	12320	12420	12520
21mm	.8268	12321	12421	12521
22mm	.8661	12322	12422	12522
23mm	.9055	12323	12423	12523
24mm	.9449	12324	12424	12524
25mm	.9843	12325	12425	12525
26mm	1.0236	12326	12426	12526
27mm	1.0630	12327	12427	12527
28mm	1.1024	12328	12428	12528
29mm	1.1417	12329	12429	12529
30mm	1.1811	12330	12430	12530
31mm	1.2205	12331	12431	12531
32mm	1.2598	12332	12432	12532
33mm	1.2992	12333	12433	12533
34mm	1.3386	12334	12434	12534
35mm	1.3779	12335	12435	12535
36mm	1.4173	12336	12436	12536
37mm	1.4567	12337	12437	12537
38mm	1.4961	12338	12438	12538
39mm	1.5354	12339	12439	12539
40mm	1.5743	12340	12440	12540
41mm	1.6142	12341	12441	12541
42mm	1.6535	12342	12442	12542
43mm	1.6929	12343	12443	12543
44mm	1.7323	12344	12444	12544
45mm	1.7717	12345	12445	12545
46mm	1.8110	12346	12446	12546
47mm	1.8504	12347	12447	12547
48mm	1.8898	12348	12448	12548
49mm	1.9291	12349	12449	12549
50mm	1.9685	12350	12450	12550
51mm	2.0079	12351	12451	12551
52mm	2.0472	12352	12452	12552
53mm	2.0866	12353	12453	----
54mm	2.1260	12354	12454	----
55mm	2.1654	12355	12455	----
56mm	2.2047	12356	12456	----
57mm	2.2441	12357	12457	----
58mm	2.2835	12358	12458	----
59mm	2.3228	12359	12459	----
60mm	2.3622	12360	12460	----



# HOUGEN® "12,000-SERIES" FUSION™ ANNULAR CUTTERS

Designed for convenience with all the quality and characteristics of the "12,000-Series" cutters with the added benefit of the Fusion™ shank for use in Hougen® drills and competitive tool-less magnetic drills. "12,000-Series" Fusion™ Cutters provide 2x the tool life when used in Hougen® magnetic drills.

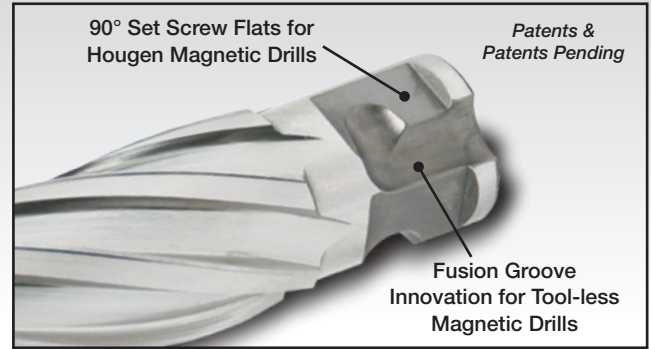

Cutter Dia. (Metric)	Decimal Equivalent	Part No.	
		1" D.O.C. (25mm)	2" D.O.C. (50mm)
Use with pilot		10531	10532
12mm	.4724	82312	82412
13mm	.5118	82313	82413
14mm	.5512	82314	82414
15mm	.5906	82315	82415
Use with pilot		10527	10528
16mm	.6299	82316	82416
17mm	.6693	82317	82417
18mm	.7087	82318	82418
19mm	.7480	82319	82419
20mm	.7874	82320	82420
21mm	.8268	82321	82421
22mm	.8661	82322	82422
23mm	.9055	82323	82423
24mm	.9449	82324	82424
25mm	.9843	82325	82425
26mm	1.0236	82326	82426
27mm	1.0630	82327	82427
28mm	1.1024	82328	82428
29mm	1.1417	82329	82429
30mm	1.1811	82330	82430
31mm	1.2205	82331	82431
32mm	1.2598	82332	82432
33mm	1.2992	82333	82433
34mm	1.3386	82334	82434
35mm	1.3779	82335	82435
36mm	1.4173	82336	82436

Cutter Dia. (Metric)	Decimal Equivalent	Part No.	
		1" D.O.C. (25mm)	2" D.O.C. (50mm)
Use with pilot		10527	10528
37mm	1.4567	82337	82437
38mm	1.4961	82338	82438
39mm	1.5354	82339	82439
40mm	1.5743	82340	82440
41mm	1.6142	82341	82441
42mm	1.6535	82342	82442
43mm	1.6929	82343	82443
44mm	1.7323	82344	82444
45mm	1.7717	82345	82445
46mm	1.8110	82346	82446
47mm	1.8504	82347	82447
48mm	1.8898	82348	82448
49mm	1.9291	82349	82449
50mm	1.9685	82350	82450
51mm	2.0079	82351	82451
52mm	2.0472	82352	82452

All Cutters are available with **stack geometry**.  
To order: add 'S' to end of part no. ie...82325S.  
(Some sizes may take 7-10 days. Call for availability).

## "12,000-SERIES" TAP DRILL SIZES

A clean, accurate hole helps to make tapping an easier task. You can achieve that task easily with these tap drill size "12,000-Series" Cutters. Kit #12007 contains five popular sizes of tap drills.

Cutter Dia. (Inches)	Decimal Equivalent	Thread	Part No.	
			1" D.O.C.	2" D.O.C.
Use with Pilot			10531	10532
7/16	.4375	1/2-13	12114	12214
29/64	.4531	1/2-20	----	12010
31/64	.4844	9/16-12	----	12011
33/64	.5156	9/16-18	----	12012
17/32	.5313	5/8-11	12117	12217
37/64	.5781	5/8-18	----	12014
19/32	.5938	11/16-11	----	12219
Use with Pilot			10527	10528
21/32	.6563	3/4-10	12121	12221
11/16	.6875	3/4-16	12122	12222
23/32	.7188	1/2-14 NPT	----	12223
49/64	.7656	7/8-9	----	12020
25/32	.7812	7/8-9	12125	12225
13/16	.8125	7/8-14	12126	12226
7/8	.8750	1-8	12128	12228
59/64	.9219	1-12	----	12025

## PILOTS - "12,000-SERIES"

The pilot serves three functions when used with "12,000-Series" cutters in a portable magnetic drill; 1) Locate the holes center point, 2) Initiate coolant flow to the center of the tool, 3) Eject the slug at the end of the cut. Always use a sharp pilot for best results.



Part No.	Description
10527	1" D.O.C. Pilot (5/8" - 2-3/8" & 16mm - 60mm)
10528	2" D.O.C. Pilot (5/8" - 2-3/8" & 16mm - 60mm)
10531	1" D.O.C. Pilot (7/16 - 9/16" & 12 - 15mm)
10532	2" D.O.C. Pilot (7/16 - 9/16" & 12 - 15mm)
24131	3" D.O.C. Pilot (3/4" - 2-3/8" & 19mm - 52mm)
4-10528	4" Pilot for Extended Reach "12,000-Series"
6-10528	6" Pilot for Extended Reach "12,000-Series"
Pilots for Old Style "12,000-Series" Cutters	
10533	1" D.O.C. Pilot (1/2" - 11/16" & 13mm - 18mm)
10534	2" D.O.C. Pilot (1/2" - 11/16" & 13mm - 18mm)

## EXTENDED REACH CUTTERS

Choose this select series of cutters to give you extra reach in deep hole drilling applications. Each cutter features the same cutting geometry and action as the standard depth "12,000-Series" cutters, but in the extended 4" and 6" depth of cut. Also available with stack-cut geometry. Made in USA.

Cutter Dia. (Inches)	Part No.	
	4" D.O.C. (102mm)	6" D.O.C. (152mm)
Use with Pilot	4-10528	6-10528
13/16	4-12226*	6-12226*
15/16	4-12230*	6-12230*
1-1/16	4-12234*	6-12234*
1-3/16	4-12238*	6-12238*

## "12,000-SERIES" M2 CUTTERS TiN COATED

"12,000-Series" cutters with a TiN Coating increases tool life, reduces friction, and operates at cooler temperatures. For materials up to 325 BHN (34.5 HRC) or gummy materials. Made in USA.

Cutter Dia. (Inches)	Decimal Equiv.	Part No.	
		1" D.O.C.	2" D.O.C.
Use with Pilot		10531	10532
7/16	.4375	12614	12714
1/2	.5000	12616	12716
9/16	.5625	12618	12718
Use with Pilot		10527	10528
5/8	.6250	12620	12720
11/16	.6875	12622	12722
3/4	.7500	12624	12724
13/16	.8125	12626	12726
7/8	.8750	12628	12728
15/16	.9375	12630	12730
1	1.0000	12632	12732
1-1/16	1.0625	12634	12734
1-1/8	1.1250	12636	12736
1-3/16	1.1875	12638	12738

Cutter Dia. (Inches)	Decimal Equiv.	Part No.	
		1" D.O.C.	2" D.O.C.
Use with Pilot		10527	10528
1-1/4	1.2500	12640	12740
1-5/16	1.3125	12642	12742
1-3/8	1.3750	12644	12744
1-7/16	1.4375	12646	12746
1-1/2	1.5000	12648	12748
1-9/16	1.5625	12650	12750
1-5/8	1.6250	12652	12752
1-11/16	1.6875	12654	12754
1-3/4	1.7500	12656	12756
1-13/16	1.8125	12658	12758
1-7/8	1.8750	12660	12760
1-15/16	1.9375	12662	12762
2	2.0000	12664	12764
2-1/16	2.0625	----	12766
2-1/8	2.1250	----	12768
2-3/16	2.1875	----	12770
2-1/4	2.2500	----	12772
2-5/16	2.3125	----	12774
2-3/8	2.3750	----	12776

## "12,000-SERIES" M42 PREMIUM CUTTERS

"12,000-Series" Premium Steel Cutters with TiN Coating extends tool life, reduces friction, and operates at cooler temperatures. They're made from M42 high speed steel for cutting materials up to 350 BHN (37.7 HRC) or gummy materials. These tools are specifically designed to stay cool throughout the cut. For materials up to 2" (50mm) thick. Made in USA.

Cutter Dia. (Inches)	Decimal Equiv.	Part No.
7/8	.8750	01354
15/16	.9375	01355
1	1.0000	01356
1-1/16	1.0625	01357
1-1/8	1.1250	01358
1-3/16	1.1875	01359
1-1/4	1.2500	01360
1-5/16	1.3125	01361
1-3/8	1.3750	01362
1-7/16	1.4375	01363
1-1/2	1.5000	01364



 Made in U.S.A.

## "12,000-SERIES" CUTTER KITS



A group of eleven "12,000-Series" cutter kits are conveniently packaged with the most popular diameters in protective cases for easy transporting and safe storage. Choose from fractional or metric diameters, in 1" or 2" depth of cut. Each kit includes hex wrenches and 2 pilots.

Part No.	Mat'l / Coating	D.O.C.	Diameters Included
12001	M2 HSS	1"	9/16, 11/16, 13/16, 15/16, 1-1/16"
12002	M2 HSS	2"	9/16, 11/16, 13/16, 15/16, 1-1/16"
12003	M2 HSS	25mm	14mm, 16mm, 18mm, 20mm, 22mm
12004	M2 HSS	50mm	14mm, 16mm, 18mm, 20mm, 22mm
12005	M2 HSS	1"	5/8, 3/4, 7/8, 1, 1-1/8"
12006	M2 HSS	2"	5/8, 3/4, 7/8, 1, 1-1/8"
12007	M2 HSS	2"	7/16, 17/32, 21/32, 25/32, 7/8"
12601	M2 / TiN	1"	9/16, 11/16, 13/16, 15/16, 1-1/16"
12702	M2 / TiN	2"	9/16, 11/16, 13/16, 15/16, 1-1/16"
82003	M2 HSS	25mm	Fusion - 14mm, 16mm, 18mm, 20mm, 22mm
82004	M2 HSS	50mm	Fusion - 14mm, 16mm, 18mm, 20mm, 22mm



# ROTALOC™ & ROTALOC PLUS™ ANNULAR CUTTERS AND KITS



 Made in U.S.A.

Patented

RotaLoc™ Annular Cutters are designed for use with the Hougen® HMD115 Ultra-Low Profile Truck Frame Drill. They're made of M42 high speed steel and feature Stack Cut geometry for penetrating multiple plates in a single pass, up to 3/4" depth of cut.

RotaLoc Plus™ Annular Cutters are designed for the Hougen® HMD150 Low Profile Drill. They're made of M2 high speed steel and are designed for a full 1" D.O.C.

Both series feature a 5/8" bayonet-style shank mounting for fast change out, with no other tools required to install in the drill spindle, and can be as easily removed. For optimum cutter tool life and cutter efficiency use Hougen® Slick-Stik™ Lubricant.

## ROTALOC™ ANNULAR CUTTERS M42 HSS - 3/4" D.O.C. - STACK CUT (FOR HMD115 OR HMD150)

Cutter Dia. (Inches)	Decimal Equiv.	Part No.
Use with Pilot 17100		
1/2	.5000	17116
9/16	.5625	17118
5/8	.6250	17120
11/16	.6875	17122
3/4	.7500	17124
13/16	.8125	17126
7/8	.8750	17128
15/16	.9375	17130
1	1.0000	17132
1-1/16	1.0625	17134
Use with Pilot 17100 - 3/4" (19mm) D.O.C		
12mm	.4724	17300
13mm	.5118	17302
14mm	.5512	17304
15mm	.5906	17306
16mm	.6299	17308
17mm	.6693	17310
18mm	.7087	17312
19mm	.7480	17314
20mm	.7874	17316
21mm	.8268	17318
22mm	.8661	17320
23mm	.9055	17322
24mm	.9449	17324
24.5mm	.9645	17325
25mm	.9843	17326
26mm	1.0236	17328
26.5mm	1.0433	17329
27mm	1.0630	17330



## ROTALOC™ & ROTALOC PLUS™ PILOTS

Part No.	Description
17100	Standard Pilot for HMD115
17101	Spring Ejection Pilot*
17470	For use with HMD150

\* For early model HMD115 w/o spring ejection and all HMD100 drills.

## ROTALOC PLUS™ ANNULAR CUTTERS M2 HSS - 1" D.O.C. - (FOR HMD150)

Cutter Dia. (Inches)	Decimal Equiv.	Part No.
Use with Pilot 17470		
7/16	.4375	17214
1/2	.5000	17216
17/32	.5313	17217
9/16	.5625	17218
5/8	.6250	17220
11/16	.6875	17222
3/4	.7500	17224
13/16	.8125	17226
7/8	.8750	17228
15/16	.9375	17230
1	1.0000	17232
1-1/16	1.0625	17234
1-1/8	1.1250	17236
1-3/16	1.1875	17238
1-1/4	1.2500	17240
1-5/16	1.3125	17242
1-3/8	1.3750	17244
Use with Pilot 17470 - 1" (25mm) D.O.C.		
12mm	.4724	17400
13mm	.5118	17402
14mm	.5512	17404
15mm	.5906	17406
16mm	.6299	17408
17mm	.6693	17410
17.5mm	.6890	17411
18mm	.7087	17412
19mm	.7480	17414
20mm	.7874	17416
21mm	.8268	17418
22mm	.8661	17420
23mm	.9055	17422
24mm	.9449	17424
24.5mm	.9645	17425
25mm	.9843	17426
26mm	1.0236	17428
26.5mm	1.0433	17429
27mm	1.0630	17430
28mm	1.1024	17432
29mm	1.1417	17434
30mm	1.1811	17436
31mm	1.2205	17438
32mm	1.2598	17440
33mm	1.2992	17442
34mm	1.3386	17444
35mm	1.3779	17446



## ROTALOC™ & ROTALOC PLUS™ CUTTER KITS


Kit No.	Description
<b>RotaLoc Kits for HMD115 and HMD150</b>	
17001	Kit contains (10) cutters, 3/4" D.O.C. - 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1 & 1-1/16" dia, plus (2) Pilots in a sturdy plastic case.
17700	Kit contains (3) cutters, 3/4" D.O.C. - 1/2, 5/8, 3/4" dia, plus (3) Pilots in a sturdy plastic case.
17701	Kit contains (3) cutters, 3/4" D.O.C. - 9/16, 11/16, 13/16" dia, plus (3) Pilots in a sturdy plastic case.
17704	Kit contains (3) cutters, 3/4" D.O.C. - 13mm, 15mm, 18mm dia, plus (3) Pilots in a sturdy plastic case.
17705	Kit contains (3) cutters, 3/4" D.O.C. - 13mm, 16mm, 19mm dia, plus (3) Pilots in a sturdy plastic case.
<b>RotaLoc Plus Kits for HMD150</b>	
17800	Kit contains (3) cutters, 1" D.O.C. - 1/2, 5/8, 3/4" dia, plus (3) Pilots in a sturdy plastic case.
17801	Kit contains (3) cutters, 1" D.O.C. - 9/16, 11/16, 13/16" dia, plus (3) Pilots in a sturdy plastic case.
17804	Kit contains (3) cutters, 1" D.O.C. - 14mm, 16mm, 18mm dia, plus (3) Pilots in a sturdy plastic case.

All Cutters are available with **stack geometry**. To order: add 'S' to end of part no. ie...17226S. (Some sizes may take 7-10 days. Call for availability). RotaLoc Cutters for the HMD115 come standard with stack geometry.

# COPPERHEAD™ CARBIDE TIP CUTTERS



Copperhead™ Carbide Tip Cutters offer extended tool life on abrasive, tough-to-cut materials and in high-speed mag drills such as the HMD508. The unique Hougen design includes a special tooth geometry that helps maintain a better chip flow than other brands. Copperhead Cutters are available with two different shanks. The standard 3/4" two flat shank and the Fusion shank for toolless magnetic drill arbors. Using the set screw arbor system can result in up to **2x** the tool life as tool-less systems.

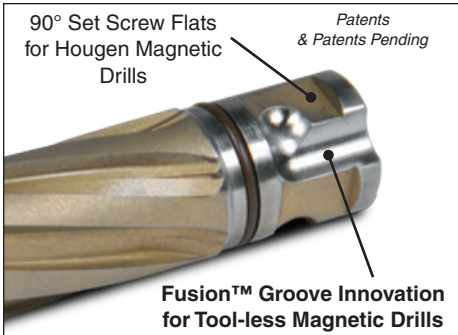

Cutter Dia. (Inches)	Part No. Standard Two Flat Shank				Part No. Fusion Shank	
	1" D.O.C. (25mm)	2" D.O.C. (50mm)	3" D.O.C. (76mm)	4" D.O.C. (102mm)	1" D.O.C. (25mm)	2" D.O.C. (50mm)
Use with Pilot	10529	10530	10535	10540	10529	10530
9/16	18118	18218	----	----	18718	18618
5/8	----	18220	----	----	----	18620
11/16	18122	18222	3-18222	4-18222	18722	18622
3/4	----	18224	3-18224	4-18224	----	18624
13/16	18126	18226	3-18226	4-18226	18726	18626
7/8	----	18228	3-18228	4-18228	----	18628
15/16	18130	18230	3-18230	4-18230	18730	18630
1	----	18232	3-18232	4-18232	----	18632
1-1/16	18134	18234	3-18234	4-18234	18734	18634
1-1/8	----	18236	3-18236	4-18236	----	18636
1-3/16	----	18238	3-18238	4-18238	----	18638
1-1/4	----	18240	3-18240	4-18240	----	18640
1-5/16	----	18242	3-18242	4-18242	----	18642
1-3/8	----	18244	3-18244	4-18244	----	18644
1-1/2	----	18248	3-18248	4-18248	----	18648
1-5/8	----	18252	3-18252	4-18252	----	18652
1-3/4	----	18256	3-18256	4-18256	----	18656
1-7/8	----	18260	3-18260	4-18260	----	18660
2	----	18264	3-18264	4-18264	----	18664

# COPPERHEAD™ CARBIDE TIP CUTTERS - METRIC

Cutter Dia. (Metric)	Part No.	
	Standard Two Flat Shank	Fusion Shank
Use with Pilot 10530 - 2" (50mm) D.O.C.		
14mm	18414	18814
15mm	18415	18815
16mm	18416	18816
17mm	18417	18817
18mm	18418	18818
19mm	18419	18819
20mm	18420	18820
21mm	18421	18821
22mm	18422	18822
23mm	18423	18823
24mm	18424	18824
25mm	18425	18825
26mm	18426	18826
27mm	18427	18827

28mm	18428	18828	45mm	18445	18845
29mm	18429	18829	46mm	18446	18846
30mm	18430	18830	47mm	18447	18847
31mm	18431	18831	48mm	18448	18848
32mm	18432	18832	49mm	18449	18849
33mm	18433	18833	50mm	18450	18850
34mm	18434	18834	51mm	18451	----
35mm	18435	18835	52mm	18452	----
36mm	18436	18836	53mm	18453	----
37mm	18437	18837	54mm	18454	----
38mm	18438	18838	55mm	18455	----
39mm	18439	18839	56mm	18456	----
40mm	18440	18840	57mm	18457	----
41mm	18441	18841	58mm	18458	----
42mm	18442	18842	59mm	18459	----
43mm	18443	18843	60mm	18460	----
44mm	18444	18844			

# COPPERHEAD™ CUTTER KITS



Copperhead Cutters are available in four kits for convenient storage and portability.

Kit No.	Description 2" (50mm) DOC Two Flat Shank Kits	Kit No.	Description 2" (50mm) DOC Fusion™ Shank Kits
18002	Fractional Kit contains (5) cutters, 9/16, 11/16, 13/16, 15/16, 1-1/16", (2) Pilots & Hex Wrenches	18006	Fractional Kit contains (5) cutters, 9/16, 11/16, 13/16, 15/16, 1-1/16", (2) Pilots & Hex Wrenches
18004	Metric Kit contains (5) cutters, 14, 16, 18, 20, & 22mm, (2) Pilots & Hex Wrenches	18008	Metric Kit contains (5) cutters, 14, 16, 18, 20, & 22mm, (2) Pilots & Hex Wrenches

## INDUSTRIAL DUTY "42/43,000-SERIES" ANNULAR CUTTERS



 Made in U.S.A.

You can produce holes up to 3-1/16" in diameter thru 3" (76mm) material with the Hougen® HMD933 & HMD915 portable magnetic drills using Hougen "42/43,000-Series" Annular Cutters. The heavy duty "42/43,000-Series" Annular Cutters handle the most demanding hole production jobs requiring portability for drilling large, deep holes. The cutters feature Weldon Shank mounting (depending on cutter diameter) which also provides for convenient use in stationary machine tools. Also available in stack geometry and grind downs.

Cutter Dia. (Inches)	Decimal Equiv.	Part No.	
		M2	M2 TiN Coated
<b>3/4" Weldon Shank - 2" (50mm) D.O.C.</b>			
3/4	.7500	42024	22024
13/16	.8125	42026	22026
7/8	.8750	42028	22028
15/16	.9375	42030	22030
1	1.0000	42032	22032
1-1/16	1.0625	42034	22034
1-1/8	1.1250	42036	22036
1-3/16	1.1875	42038	22038
1-1/4	1.2500	42040	22040
1-5/16	1.3125	42042	22042
1-3/8	1.3750	42044	22044
1-7/16	1.4375	42046	22046
<b>1-1/4" Weldon Shank - 2" (50mm) D.O.C.</b>			
1-1/2	1.5000	42048	22048
1-9/16	1.5625	42050	22050
1-5/8	1.6250	42052	22052
1-11/16	1.6875	42054	22054
1-3/4	1.7500	42056	22056
1-13/16	1.8125	42058	22058
1-7/8	1.8750	42060	22060

Cutter Dia. (Inches)	Decimal Equiv.	Part No.	
		M2	M2 TiN Coated
<b>1-1/4" Weldon Shank - 2" (50mm) D.O.C.</b>			
1-15/16	1.9375	42062	22062
2	2.0000	42064	22064
<b>1-1/4" Weldon Shank - 3" (76mm) D.O.C.</b>			
2-1/16	2.0625	43066	23066
2-1/8	2.1250	43068	23068
2-3/16	2.1875	43070	23070
2-1/4	2.2500	43072	23072
2-5/16	2.3125	43074	23074
2-3/8	2.3750	43076	23076
2-7/16	2.4375	43078	23078
2-1/2	2.5000	43080	23080
2-9/16	2.5625	43082	23082
2-5/8	2.6250	43084	23084
2-11/16	2.6875	43086	23086
2-3/4	2.7500	43088	23088
2-13/16	2.8125	43090	23090
2-7/8	2.8750	43092	23092
2-15/16	2.9375	43094	23094
3	3.0000	43096	23096
3-1/16	3.0625	43098	23098



## ARBORS FOR MACHINE TOOLS

Convert CNC machines such as drill presses or mills into fast hole makers. 3 styles of holders: R-8, Straight, and Morse taper accommodate "12,000-Series" Cutters. Made in USA.

Part No.	Shank Size	Hole Capacity	
		Diameter	Depth
Arbor Assembly with Oil Inducer			
10804	#2 Morse	1"	1-1/2"
10806	#3 Morse	2-3/8"	1-1/2"
49849	R8	2-3/8"	2"
49850	1" Straight	2-3/8"	2"

Arbor Assembly without Oil Inducer			
10814	#2 Morse	1"	1-1/2"
10816	#3 Morse	2-3/8"	1-1/2"
49853	R8	2-3/8"	2"
49851	1" Straight	2-3/8"	2"



## ARBORS FOR STATIONARY TOOLS



You can also use "12,000-Series" Cutters with stationary tools and drill presses. Triple flatted shank fits 1/2" drill chucks. Uses 1" (25mm) depth of cut "12,000-Series" Cutters for materials up to 1/2" (12.7mm) thick maximum. (Not for use with Copperhead Cutters)

Part No.	Description
11016	Arbor Assembly (with set screws and spring) for 3/4" Shank Cutters up to 1/2" D.O.C. (Pilot not included)
Optional & Replacement Arbor Parts	
11041	Arbor Body
10054	1/4-28 Set Screw mod.
11069	Ejector Spring
40222	7/16-14 Soc. Hd. Cap Screw
Pilots	
11022	Starter Pilot for 7/16" - 9/16" & 12mm-15mm Dia. Cutters
11031	Starter Pilot for 5/8" - 2-1/16" & 16mm-52mm Dia. Cutters
Pilot for Old Style Cutters	
11032	Starter Pilot for 1/2"-11/16" & 13mm-18mm Dia. Cutters

## HOLE ENLARGING PILOTS - "12,000-SERIES"

Take an existing hole and make it larger using Hougén's Hole Enlarging Pilots. Available in three select sizes. Replaceable "Nose" screws on to end of pilot.



\* Use with 2" Cutters. Sold separately.

Part No.	Description
07370	Replacement Pilot
07373	11/16" Pilot assy for enlarging up to 13/16"
07372	13/16" Pilot assy for enlarging up to 15/16"
07371	15/16" Pilot assy for enlarging up to 1-1/16"
07368	11/16" Replacement Nose
07367	13/16" Replacement Nose
07366	15/16" Replacement Nose

## SHARPENING MACHINE



Shipping Weight: 64 lbs (29 kgs)

The Model 10950 Sharpening Machine has been specifically designed for reshaping "12,000-Series", RotaLoc™, and RotaLoc Plus™ Annular Cutters. It provides ease of operation while restoring factory specified tooth geometry. Made in USA.

- Improved holders and fasteners allow easier changes and tool sharpening.
- Holder bushing is more accurate for precise tooth height.

Part No.	Description
10950	Sharpening Machine (120V)
10950A	Sharpening Machine - No Motor (Requires Bosch Motor - 230V Model GGS 27L Purchase from local source)
03983	Borazon® Cup Wheel
04049	Tool holder - "12,000-Series"
04072	Borazon® Gullet Wheel
10747	Dressing Stick
10779	7/32" Hex Wrench for #04049
Optional Accessories	
04147	Tool Holder - RotaLoc™ Cutters
04118	Work Stand

## CUSTOM CUTTERS AND MACHINES

Hougen can solve your holemaking problems with creative solutions to help you get the job done, complete it faster and at a lower cost. We have helped thousands of customers with unique holemaking solutions, from grind downs, to special cutting tools, to one of a kind magnetic drills. Give us a call or send us an email with your holemaking challenge.



# ROTACUT™ SHEET METAL HOLE CUTTERS



Holemaking – faster and easier than with conventional twist drills and hole saws – in sheet metal, plate materials, and plastics up to 1/2" thick. RotaCut™ Cutters are precision-ground and produce clean, burr-free, round holes without deforming the surrounding material. For use in hand held drills with either 3/8" or 1/2" chucks, and in air feed drill spindles for production work. Lasts **10x** longer and cuts **3x** faster than twist drills or hole saws.

Cutter Dia. (Inches)	Decimal Equiv.	Part No.
3/8"-24 Thread Mount & 1/4" D.O.C. Use with Arbor 11088 or 11006		
1/4	.2500	11100
9/32	.2812	11102
5/16	.3125	11104
11/32	.3438	11106
Use with Arbor 11088, 11089, or 11006		
3/8	.3750	11108
13/32	.4062	11110
27/64	.4219	11111
7/16	.4375	11112
29/64	.4531	11113
15/32	.4688	11114
1/2	.5000	11116
17/32	.5312	11118
9/16	.5625	11120
5/8	.6250	11124
11/16	.6875	11128
23/32	.7188	11130
3/4	.7500	11132
1/2"-20 Thread Mount & 1/2" D.O.C. Use with Arbor 11005 or 11012		
13/16	.8125	11136
7/8	.8750	11140
15/16	.9375	11144
1	1.0000	11148
1-1/16	1.0625	11152
1-1/8	1.1250	11156
1-3/16	1.1875	11160
1-1/4	1.2500	11164
1-5/16	1.3125	11165
1-3/8	1.3750	11166
1-7/16	1.4375	11167
1-1/2	1.5000	11168

Special sizes of RotaCut™ Cutters are available on request. Contact the Hougen Customer Service Department for more information.  
800-426-7818

Cutter Dia. (Metric)	Decimal Equiv.	Part No.
3/8"-24 Thread Mount & 6.4mm D.O.C. Use with Arbor 11088 or 11006		
6mm	.2362	11206
7mm	.2756	11207
8mm	.3150	11208
8.5mm	.3346	11285
9mm	.3543	11209
Use with Arbor 11088, 11089, or 11006		
10mm	.3937	11210
11mm	.4331	11211
12mm	.4724	11212
13mm	.5118	11213
14mm	.5512	11214
15mm	.5906	11215
16mm	.6299	11216
17mm	.6693	11217
18mm	.7087	11218
19mm	.7480	11219
20mm	.7874	11220
1/2"-20 Thread Mount & 12.7mm D.O.C. Use with Arbor 11005 or 11012		
21mm	.8268	11221
22mm	.8661	11222
23mm	.9055	11223
24mm	.9449	11224
25mm	.9843	11225

## ROTACUT™ SPOTWELD CUTTER

Remove spotwelds in auto body and restoration work quickly with the RotaCut™ Premium Spotweld Cutter. Heavy cutter wall and fast cutting action that can last for hundreds of spotwelds.

Part No.	Description
11200C	Package includes 3/8" RotaCut p/n 11108, Arbor p/n 11088, and instructions.


# ROTACUT™ KITS



11087 Kit


Hougen® offers kits packaged in sturdy cases for keeping handy the most often used sizes of RotaCut™ Annular Cutters.

Part No.	Description
11075(C) (Fractional)	Kit contains an 11088 Arbor Assembly, Center Punch, extra Pilot, and (7) Cutters: 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, & 3/4" (DOC: 1/4" / 6.4mm)
11075-12 (Fractional)	Contains (12) 11075 Kits in a pop up display box
11077 (Metric)	Kit contains an 11088 Arbor Assembly, Center Punch, extra Pilot, and (7) Metric Cutters: 8, 10, 12, 14, 16, 18, & 20mm (DOC: 1/4" / 6.4mm)
11078 (Fractional)	Kit contains an 11005 Arbor Assembly, Center Punch, extra Pilot, and (6) Cutters: 7/8, 1, 1-1/8, 1-1/4, 1-3/8, & 1-1/2" (DOC: 1/2" / 12.7mm)
11078-12 (Fractional)	Contains (12) 11078 Kits
11085 (Fractional)	Fractional Master Kit 16 Sizes of cutters from 1/4" to 3/4", extra Pilots, Arbor & Center Punch (DOC: 1/4" / 6.4mm)
11085-12 (Fractional)	Contains (12) 11085 Kits
11086 (Metric)	Metric Master Kit 16 Sizes of cutters from 6mm to 20mm, extra Pilots, Arbor & Center Punch (DOC: 1/4" / 6.4mm)
11087 (Fractional)	Fractional Combo Kit Combines the 11075 and 11078 kits into one awesome package.

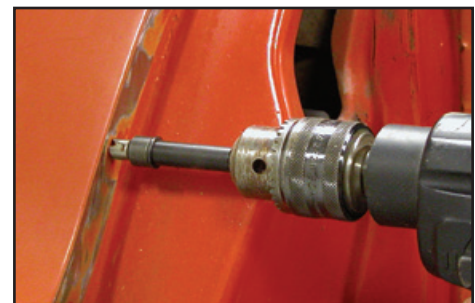





## ROTACUT™ SHEET METAL ARBORS

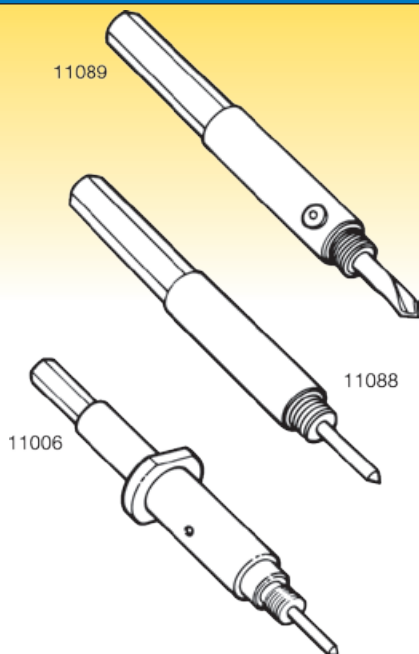

### ARBORS FOR 3/8" CHUCKS

Part No.	Description
With 3/8"-24 Mounting Thread	
11088	Arbor with Pilot Pin (11083)
11089	Arbor with Pilot Drill (03913C) (For use with 3/8" thru 3/4" dia.)
11006	Arbor with Pilot Pin (11083) (For use in 5/8" Drill Bushing)

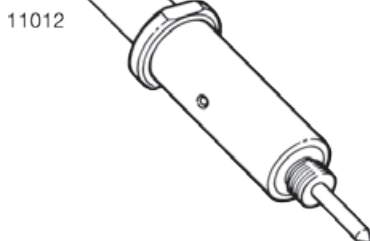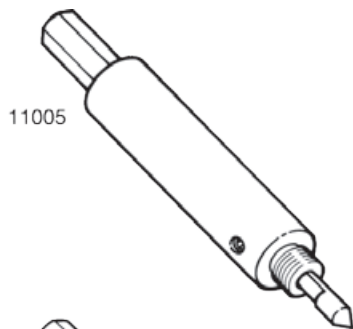


### ARBORS FOR 1/2" CHUCKS

Part No.	Description
With 1/2"-20 Mounting Thread	
11005	Arbor with Pilot Pin (11027) (For use with 13/16" thru 1-1/2" dia.)
11012	Arbor with Pilot Pin (11084) (For use with 15/16" Drill Bushing)

For additional arbor replacement parts visit [www.hougen.com](http://www.hougen.com)

## EXTENDED REACH CUTTERS

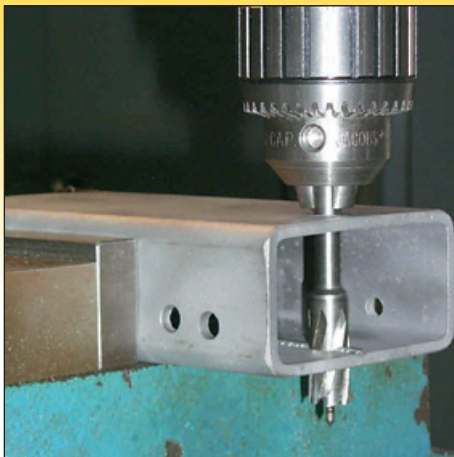

Cutter Dia. (Inches)	Decimal Equiv.	Part No.
Triple Flat Arbor with .80" flute & 1/4" D.O.C.		
3/8	.3750	16112
7/16	.4375	16114
1/2	.5000	16116
9/16	.5625	16118

Hougen® Extended Reach Cutters are designed for applications where additional reach and a shallow depth of cut is required. They're ideally suited for trailer hitch installations, or single pass through holes in square and rectangular pipe and tubing. The cutter and arbor are a single-piece construction and include a spring loaded pilot for "popping out" the slug at the end of the cut. For use in 3/8" or larger drill chucks. Made in USA.



Part No.	Description
16005	Kit contains (4) Cutters: 3/8, 7/16, 1/2, & 9/16", (2) extra Pilots (11083), and a Hex Wrench



## STEP DRILLS



Hougen® Step Drills allow the convenience of drilling multiple size holes using one drill bit. These tools offer improved tool life because they are made premium Cobalt M42 HSS and TiN coated. The Hougen split point quickly starts the hole and the double angled flutes increase penetration speed. For use in sheet metal, aluminum, stainless steel and some plastics.



Part No.	Size	Material Thickness
35200	1/8" to 1/2"	1/8"
35201	3/16" to 1/2"	3/8"
35202	3/16" to 7/8"	1/8"

Find your nearest Hougen dealer at [www.hougen.com](http://www.hougen.com)

## CARBIDE HOLCUTTER™ FOR SHEET METAL AND THIN MATERIALS



day out use. Features a shoulder stop to prevent over penetration of the work piece. Ejector Spring helps with slug ejection. Tungsten carbide provides long tool life and smooth cutting action. Dramatically outlasts bi-metal hole saws and step drills. For materials up to 1/8" (3.2mm) thick. (All cutters include arbor, pilot and spring.)

**Contractor's Choice**

Carbide Holcutters cut smooth, fast, burr-free holes in all types of materials, from soft aluminum to tough-to-cut stainless and cast iron. Rugged construction for day in and

Cutter Dia. (Inches)	Decimal Equiv.	Part No.
Replacement Pilot 14301 & Spring 14303 (3/8" Chuck)		
11/16	.6875	14322
3/4	.7500	14324
13/16	.8125	14326
7/8	.8750	14328
15/16	.9375	14330
1	1.0000	14332
1-1/16	1.0625	14334
1-1/8	1.1250	14336
1-3/16	1.1875	14338
1-1/4	1.2500	14340
1-5/16	1.3125	14342

Cutter Dia. (Inches)	Decimal Equiv.	Part No.
1-3/8	1.3750	14344
1-1/2	1.5000	14348
1-5/8	1.6250	14352
1-3/4	1.7500	14356
2	2.0000	14362
2-1/8	2.1250	14366
2-1/4	2.2500	14368
2-3/8	2.3750	14372
Replacement Pilot 14302 & Spring 14304 (1/2" Chuck)		
2-1/2	2.5000	14374
2-5/8	2.6250	14378
2-3/4	2.7500	14380
3	3.0000	14384

Part No.	Description
14301	Pilot for cutters up to 2-3/8" (3 Pk)
14302	Pilot for cutters 2-1/2" to 3" (3 Pk)
14303	Spring for cutters up to 2-3/8" (3 Pk)
14304	Spring for cutters 2-1/2" to 3" (3 Pk)

## HOLCUTTER™ FOR SHEET METAL AND THIN MATERIALS



HSS Holcutters last **10x** longer and cut **3x** faster than bi-metal hole saws or twist drills. All cutters use a single arbor, with a patented Quad-Lead thread mounting system. For materials up to 1/8" (3.2mm) thick.

1-3/16	1.1875	14238
1-1/4	1.2500	14240
1-5/16	1.3125	14242
1-3/8	1.3750	14244
1-7/16	1.4375	14246
1-1/2	1.5000	14248
1-9/16	1.5625	14250
1-5/8	1.6250	14252
1-11/16	1.6875	14254
1-3/4	1.7500	14256
1-7/8	1.8750	14260
2	2.0000	14262
2-1/16	2.0625	14264
2-1/8	2.1250	14266
2-1/4	2.2500	14268
2-3/8	2.3750	14272
2-1/2	2.5000	14274
2-9/16	2.5625	14276
2-5/8	2.6250	14278
2-3/4	2.7500	14280
2-7/8	2.8750	14282
3	3.0000	14284



Part No.	Description
14009	Arbor (3/8" Chuck) for Quad-Lead Threaded Cutters includes pilot & hex washer
04812	Replacement Hex Washer
13007C	Pilot for 14009 Arbor (3 Pk)
Arbors for Discontinued Holcutters	
14001	Arbor for 3/8" Threaded Cutters
14004	Arbor for Double "D" Cutters

Cutter Dia. (Inches)	Decimal Equiv.	Part No.
Quad-Lead thread mount - Use Arbor 14009		
11/16	.6875	14222
3/4	.7500	14224
13/16	.8125	14226
7/8	.8750	14228
15/16	.9375	14230
1	1.0000	14232
1-1/16	1.0625	14234
1-1/8	1.1250	14236

## HOLCUTTER™ KIT



Part No.	Description
14005(C)	Sturdy plastic case contains Arbor, Pilots, Hex Washer, instructions, and HSS Holcutters: 7/8, 1-1/8, 1-3/8, 1-3/4, 2 & 2-1/2"
14005-12	Case of (12) 14005 Kits

## HOLCUTTER™ SPEED REDUCER



Featuring a 4:1 gear ratio, the Holcutter™ Speed Reducer mounts directly to your 1/2" drill and maintains torque while reducing RPMs for 1" and larger HSS Holcutters. Cutters mount to Speed Reducer with no arbor required.

Part No.	Description
14008	Speed Reducer for 1/2" Drills
*04938	Clamp Handle
*04939	3/16" Pilot
04942	Thread Adapter for 3/8" Drills
04943	Triple-flatted Shank Adapter (for use in 1/2" drill chuck)
04812	Hex Washer (for easy cutter removal)

\* Details marked are required to operate Speed Reducer



## TORNADO II™ PAINT SHAKER



The lightweight Hougen® Tornado II™ Portable Paint Shaker can be used on benches or the floor without bolting it down. Blending cycles can be set to numerous time intervals via the convenient up-front control panel. Three-axis orbital action assures complete mixing of gallons, pints, quarts or aerosols. Easy to use four-point clamping securely holds containers while minimal moving parts provide quiet operation. Weight: 24lbs (10.9 kg) 26" H x 15-3/8" W x 11-1/2" D (660mm H x 391mm W x 292mm D) Can/Paint weight limit: 11 lbs (5kg)

**Mixes Pints, Quarts, Gallons,  
& Aerosols**

*Multi-Motion Blending*



*Orbital*



*Side-to-Side*



*Up & Down*

### TORNADO II PAINT SHAKER

Part No.	Description
51200	Tornado II™ Paint Shaker (115V)
51230	Tornado II™ Paint Shaker (230V)



Made in  
U.S.A.

Shipping Weight: 31 lbs (14 kgs)

## POP DISPLAYS



These counter top displays help to make the point-of-purchase sale for you. They're easy to setup and are a good way to get the product in front of your customer.

Part No.	Description
11075-12	Case of (12) RotaCut™ Kits
11745-6	Case of (6) Large Slick-Stik™
11746-24	Case of (24) Mini Slick-Stik™
12900	Case of (28) "12,000-Series" Cutters in 1" and 2" D.O.C. in sizes from 7/16" up to 1-3/8" diameter
12903	Case of (28) "12,000-Series" Cutters in 25mm and 50mm D.O.C. in sizes from 12mm up to 32mm diameter
82903	Case of (28) "12,000-Series" Fusion Cutters in 25mm and 50mm D.O.C. in sizes from 12mm up to 32mm diameter



The RotaCut™ Hole Making Center is designed to get the RotaCut™ Cutters in front of customers. You'll display open kits, replacement cutters, arbors and pilots.



The Holcutter™ display is designed to work along side of the RotaCut™ Hole Making Center, or as a stand alone.

### HOLCUTTER™ HOLE MAKING CENTER

Part No.	Description
14000C	Holcutter™ Hole Making Center includes Kits and replacement components in clamshell packages for easy display.

### ROTA CUT™ HOLE MAKING CENTER

Part No.	Description
11000C	RotaCut™ Hole Making Center includes Kits and replacement components in clamshell packages for easy display.



# Hougen-Ogura™ PUNCH-PRO™

## Electro-hydraulic Hole Punches




Model:		76000	75002.5PR	75003A	75004PR	75005	75006
<b>SPECIFICATIONS</b>	Pressure (Tons)	8.5	10.1	14.85	16.9	27.5	34.1
	Approximate Punching Speed	4 seconds	2.3 seconds	1.5 seconds	2.5 seconds	3 seconds	4 seconds
	Maximum Punch Throat Depth	1.02" (26mm)	2-3/8" (60mm)	2-5/32" (54.8mm)	1-9/16" (40mm)	3-15/16" (100mm)	1-31/32" (50mm)
	Single Phase Motor	18V Cordless	120V 6.3 Amp 230V 3.3 Amp	120V 9.5 Amp 230V 5 Amp	120V 9.5 Amp 230V 5 Amp	120V 12.2 Amp 230V 6.1 Amp	120V 12.2 Amp 230V 6.1 Amp
	Weight (Less Work Stand)	16.5 lbs. (7.5 kg)	24.9 lbs. (11.3 kg)	35.8 lbs. (16.2 kg)	24.9 lbs. (11.3 kg)	79.3 lbs. (36 kg)	65 lbs. (29.5 kg)
	Shipping Weight (Approx.)	31 lbs. (14 kg)	41.2 lbs. (18.7 kg)	60.7 lbs. (27.5 kg)	41.2 lbs. (18.7 kg)	108 lbs. (49 kg)	95.9 lbs. (43.5 kg)
<b>ROUND</b>	Maximum Hole Size	19/32" (15mm)	3/4" (19mm)	25/32" (20mm)	25/32" (20mm)	7/8" (22.2mm)	15/16" (23.8mm)
	Maximum Thickness	1/4" (6.4mm)	1/4" (6.4mm)	19/64" (7.5mm)	3/8" (9.5mm)	3/8" (9.5mm)	1/2" (12.7mm)
<b>OBLONG</b>	Maximum Hole Size	7/16" x 5/8" (11mm x 16.5mm)	9/16" x 13/16" (14mm x 21mm)	9/16" x 13/16" (14mm x 21mm)	9/16" x 13/16" (14mm x 21mm)	11/16" x 13/16" (18mm x 21mm)	11/16" x 13/16" (18mm x 21mm)
	Maximum Thickness	1/4" (6.4mm)	1/4" (6.4mm)	1/4" (6.4mm)	3/8" (9.5mm)	3/8" (9.5mm)	1/2" (12.7mm)
<b>STEEL STYLES</b>	Flat Bar	✓	✓	✓	✓	✓	✓
	Channel	✓	✓	✓	✓	✓	✓
	H-Steel		✓	✓	✓	✓	✓
	Angle	✓	✓	✓	✓	✓	✓
	Lip Channel			✓			

Hougen-Ogura punches are self contained units, no need for external hydraulic pumping systems.

# Hougen®-Ogura™

## 18V CORDLESS HOLE PUNCHER

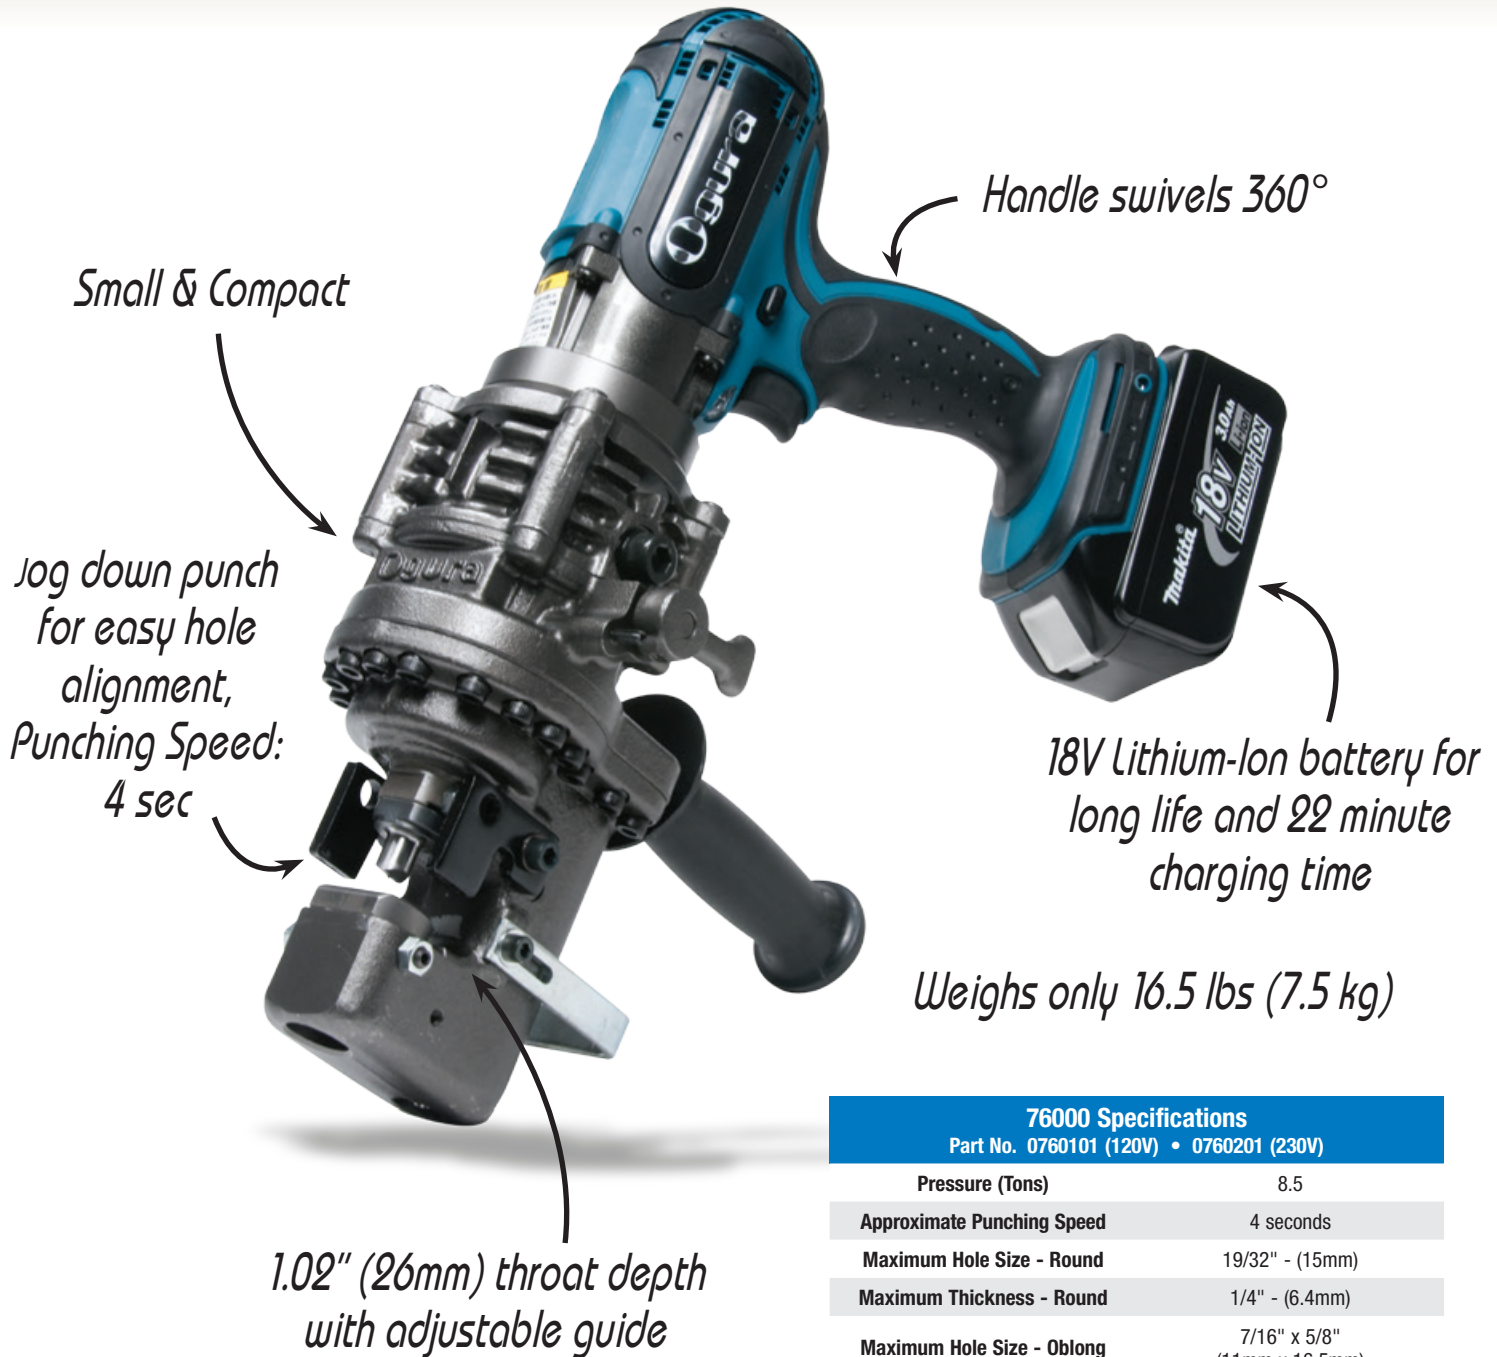

### 76000 Specifications

Part No. 0760101 (120V) • 0760201 (230V)

Pressure (Tons)	8.5
Approximate Punching Speed	4 seconds
Maximum Hole Size - Round	19/32" - (15mm)
Maximum Thickness - Round	1/4" - (6.4mm)
Maximum Hole Size - Oblong	7/16" x 5/8" (11mm x 16.5mm)
Maximum Thickness - Oblong	1/4" - (6.4mm)
Maximum Punch Throat Depth	1.02" - (26mm)
Weight	16.5 lbs - (7.5 kg)
Shipping Weight	31 lbs - (14 kg)

Includes: carrying case, 7/16" (11mm) punch & die, charger.  
Optional Stand: 75166  
Replacement Battery: 76094

# PUNCH-PRO™

PUNCH MORE HOLES, MORE OFTEN, IN MORE PLACES, IN LESS TIME



You'll punch more holes, more often in more places all in less time using a Hougen®-Ogura™ Punch-Pro™ Electro-hydraulic Hole Puncher because of its lightweight and single body construction. Unlike hole punchers with separate hydraulics that require hydraulic hoses, the Punch-Pro™ series has a unique single-body construction meaning there is only a power cord to deal with.

Punch-Pro™ models require less punching tonnage than traditional hole punchers because of an exclusive punch and die design. Six Punch-Pro™ models offer punching diameters from 1/4" up to 15/16" thru material thicknesses from 5/64" up to 1/2". Punching beats drilling.


A Punch-Pro™ dramatically reduces your hole-making costs over conventional drilling methods.

**Time Savings** — Punch-Pro™ users have documented increases in productivity over other holemaking methods. One user stated that he had achieved a 75% time savings over the old method of using twist drills.

**Fast Cycle Times** — Punch clean and accurate holes in as little as 1.2 seconds. A single trigger actuates the punch while an exclusive auto-return mechanism returns to the punch starting position.


**Ease Of Handling** — Single body lightweight construction starting at 16.5 lbs make these units easy to handle and move with only a single power cord and no separate hydraulics. And operator fatigue is reduced since the Punch-Pro™ does all the work.

**Accuracy** — Eliminates the need to pre-drill or pre-punch. To confirm the punch position, simply jog the punch down to the center mark for the hole location. A convenient release valve allows ease of repositioning if required.

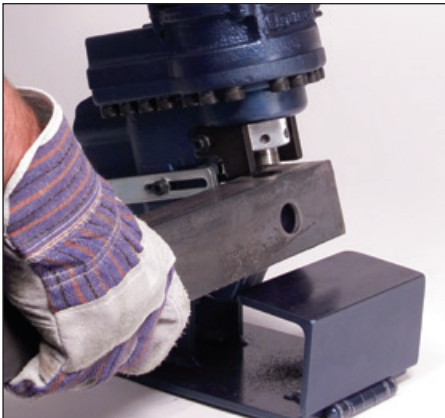

Punches are designed to punch mild or structural steel. For other materials contact Hougen Technical Service 800-426-7818.

## 75002.5PR

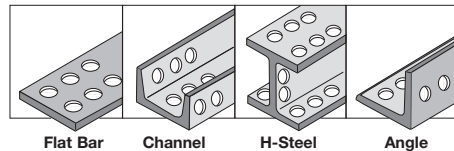

Designed for applications typically done with hand held twist drills. At just 24.9 lbs (11.3 kg), the 75002.5PR is easily handled in all types of punching applications, on site or in the shop. Punch round and oblong holes in materials from up to 1/4" (6.4mm) thick. Its 2-3/8" (60mm) throat depth provides excellent reach and versatility. Easily confirm the hole position with the jog down feature. Punch automatically returns to the starting position after the punching cycle is complete. Or if punch resists returning to the home position, use the power retract. Work stand, foot switch, 7/16" (11mm) punch & die, tool kit and carrying case are included.


### Model 75002.5PR Specifications

Part No. 0752102 (120V) • 0752202 (230V)


Pressure (Tons)	10.1
Approximate Punching Speed	2.3 seconds
Maximum Hole Size - Round	3/4" - (19mm)
Maximum Thickness - Round	1/4" - (6.4mm)
Maximum Hole Size - Oblong	9/16" x 13/16" (14mm x 21mm)
Maximum Thickness - Oblong	1/4" - (6.4mm)
Maximum Punch Throat Depth	2-3/8" - (60mm)
120V/50-60Hz AC	6.3 Amps / 710 Watts
230V/50-60Hz AC	3.3 Amps / 710 Watts
Weight (less work stand)	24.9 lbs - (11.3 kg)
Shipping Weight (approx)	41.2 lbs - (18.7 kg)



## 75003A

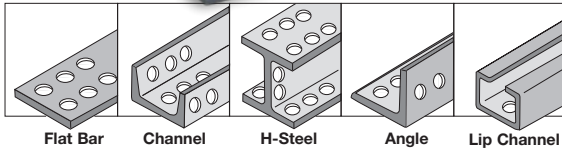

Provides extra versatility with a unique throat design and the ability to adapt to two punch and die styles. The standard punch/long die combination allows flanged sections to be "swallowed" while the long punch/standard die combination allows the tooling to reach through narrow lip channel to punch the web section. It has the jog down and automatic punch return features like all models. Work stand, foot switch, 9/16" (14mm) punch & (2) dies, tool kit and carrying case are included.

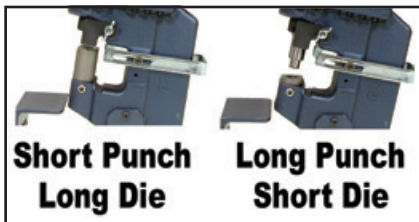


75003A Specifications	
Part No. 0753101 (120V) • 0753201 (230V)	
Pressure (Tons)	14.85
Approximate Punching Speed	2 seconds
Maximum Hole Size - Round	25/32" - (20mm)
Maximum Thickness - Round	19/64" - (7.5mm)
Maximum Hole Size - Oblong	9/16" x 13/16" (14mm x 21mm)
Maximum Thickness - Oblong	1/4" - (6.4mm)
Maximum Punch Throat Depth	2-5/32" - (54.8mm)
120V/50-60Hz AC	9.5 Amps / 1050 Watts
230V/50-60Hz AC	5 Amps / 1050 Watts
Weight (less work stand)	35.8 lbs - (16.2 kg)
Shipping Weight (approx)	60.7 lbs - (27.5 kg)

## 75004PR




**Features  
Power Retractable  
Punch**

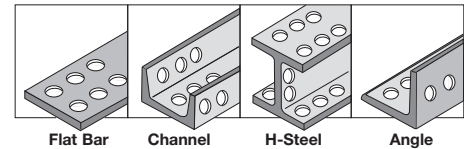

Portable electro-hydraulic punch with 16.9 tons of punching pressure can quickly punch through 3/8" (9.5mm) materials in 2.5 seconds. At just 24.9 lbs (11.3 kg), the 75004PR is easily handled in all types of punching applications, on site or in the shop. Easily confirm the hole position with the jog down feature. Punch automatically returns to the starting position after the punching cycle is complete. Or if punch resists returning to the home position, use the power retract. Work stand, foot switch, 9/16" (14mm) punch & die, tool kit and carrying case are included.

Model 75004PR Specifications	
Part No. 0754102 (120V) • 0754202 (230V)	
Pressure (Tons)	16.9
Approximate Punching Speed	2.5 seconds
Maximum Hole Size - Round	25/32" - (20mm)
Maximum Thickness - Round	3/8" - (9.5mm)
Maximum Hole Size - Oblong	9/16" x 13/16" (14mm x 21mm)
Maximum Thickness - Oblong	3/8" - (9.5mm)
Maximum Punch Throat Depth	1-9/16" - (40mm)
120V/50-60Hz AC	9.5 Amps / 1050 Watts
230V/50-60Hz AC	5 Amps / 1050 Watts
Weight (less work stand)	24.9 lbs - (11.3 kg)
Shipping Weight (approx)	41.2 lbs - (18.7 kg)

## 75005

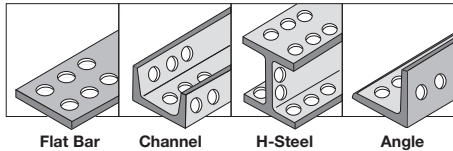


This heavy-duty model is built for punching up to 7/8" (22.2mm) diameter holes in materials up to 3/8" (9.5mm) thick. The addition of eyebolts on both sides of the unit allows for easy attachment of a lift assist or a counter-balancer for improved ergonomics. Its 3-15/16" (100mm) throat depth adds to its versatility covering a wide range of work pieces. Easily confirm the hole position with the jog down feature. Punch automatically returns to the starting position after the punching cycle is complete. Work stand, foot switch, 13/16" (20mm) punch & (2) dies and tool kit are included.

### 75005 Specifications

Part No. 0755101 (120V) • 0755201 (230V)

Pressure (Tons)	27.5
Approximate Punching Speed	4 seconds
Maximum Hole Size - Round	7/8" - (22.2mm)
Maximum Thickness - Round	3/8" - (9.5mm)
Maximum Hole Size - Oblong	11/16" x 13/16" (18mm x 21mm)
Maximum Thickness - Oblong	3/8" - (9.5mm)
Maximum Punch Throat Depth	3-15/16" - (100mm)
120V/50-60Hz AC	12.2 Amps / 1300 Watts
230V/50-60Hz AC	6.1 Amps / 1300 Watts
Weight (less work stand)	79.3 lbs - (36 kg)
Shipping Weight (approx)	108 lbs - (49 kg)

## 75006

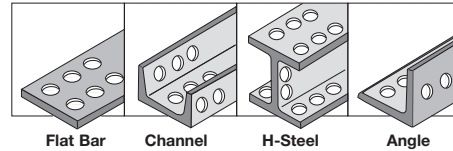

Our heaviest duty model, the 75006, develops 34.1 tons pressure and will produce round holes up to a maximum of 15/16" (23.8mm) diameter and punch through a maximum thickness of 1/2" (12.7mm) material in approximately 4 seconds. It has eyebolts on both sides for easy attachment to a lift assist or a counter-balancer for improved ergonomics. Like all Punch-Pro models, its single body design makes it easy to use anywhere. Easily confirm the hole position with the jog down feature. Punch automatically returns to the starting position after the punching cycle is complete. Work stand, foot switch, 13/16" (20mm) punch & (2) dies and tool kit are included.

### 75006 Specifications

Part No. 0756101 (120V) • 0756201 (230V)

Pressure (Tons)	34.1
Approximate Punching Speed	4 seconds
Maximum Hole Size - Round	15/16" - (23.8mm)
Maximum Thickness - Round	1/2" - (12.7mm)
Maximum Hole Size - Oblong	11/16" x 13/16" (18mm x 21mm)
Maximum Thickness - Oblong	1/2" - (12.7mm)
Maximum Punch Throat Depth	1-31/32" - (50mm)
120V/50-60Hz AC	12.2 Amps / 1300 Watts
230V/50-60Hz AC	6.1 Amps / 1300 Watts
Weight (less work stand)	65 lbs - (29.5 kg)
Shipping Weight (approx)	95.9 lbs - (43.5 kg)


# PUNCH-PRO™ — MODEL 76000

ROUND PUNCH			MATERIAL			DIE	
Size			Part No.	Thickness	Style	Size	Part No.
Nominal	Actual	Metric					
5/32"	.157	4mm	76200	5/64 (.078) to 1/8 (.125) to 14 GA.	F, A	Die 5/32 A	76204
3/16"	.197	5mm	76201	5/64 (.078) to 1/8 (.125) to 12 GA.	F, A	Die 3/16 A	76205
7/32"	.217	5.5mm	76202	5/64 (.078) to 1/8 (.125) to 14 to 12 GA.	F, A	Die 7/32 A	76206
15/64"	.236	6mm	76203	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 15/64 A	76207
				>1/8 (.125) to 5/32 (.157) to 10 to 9 GA.	F, A	Die 15/64 B	76216
1/4"	.256	6.5mm	75421	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 1/4 A	76208
				>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 1/4 B	76217
5/16"	.315	8mm	75422	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 5/16 A	76209
				>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 5/16 B	76218
11/32"	.335	8.5mm	75423	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 11/32 A	76210
				>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 11/32 B	76219
3/8"	.394	10mm	75424	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 3/8 A	76211
				>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 3/8 B	76220
				19/64 (.276) max.	C	Die 3/8 C	76245
7/16"	.433	11mm	75425	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 7/16 A	76212
				>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 7/16 B	76221
				19/64 (.276) max.	C	Die 7/16 C	76246
15/32"	.472	12mm	75917	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 15/32 A	76357
				>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 15/32 B	76358
1/2"	.512	13mm	75426	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 1/2 A	76213
				>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 1/2 B	76222
9/16"	.551	14mm	75427	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 9/16 A	76214
				>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 9/16 B	76223
19/32"	.591	15mm	76248	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 19/32 A	76215
				>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 19/32 B	76224

OBLONG PUNCH			MATERIAL			DIE	
Size			Part No.	Thickness	Style	Size	Part No.
Nominal	Actual	Metric					
1/4"	.256	6.5mm	76225	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 1/4 x 3/8 A	76229
x	x	x		>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 1/4 x 3/8 B	76236
3/8"	.394	10mm					
1/4"	.256	6.5mm	75638	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 1/4 x 1/2 A	76230
x	x	x		>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 1/4 x 1/2 B	76237
1/2"	.512	13mm					
11/32"	.335	8.5mm	75639	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 11/32 x 1/2 A	76231
x	x	x		>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 11/32 x 1/2 B	76238
1/2"	.512	13mm					
11/32"	.335	8.5mm	76226	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 11/32 x 43/64 A	76232
x	x	x		>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 11/32 x 43/64 B	76239
43/64"	.669	17mm					
23/64"	.354	9mm	76227	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 23/64 x 17/32 A	76233
x	x	x		>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 23/64 x 17/32 B	76240
17/32"	.531	13.5mm					
3/8"	.394	10mm	76228	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 3/8 x 19/32 A	76234
x	x	x		>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 3/8 x 19/32 B	76241
19/32"	.591	15mm					
7/16"	.433	11mm	75640	5/64 (.078) to 1/8 (.125) to 14 to 11 GA.	F, A	Die 7/16 x 5/8 A	76235
x	x	x		>1/8 (.125) to 1/4 (.250) to 10 to 3 GA.	F, A	Die 7/16 x 5/8 B	76242
5/8"	.650	16.5mm					



Punching capacity data is based on mild steel of 65,000 psi tensile strength.

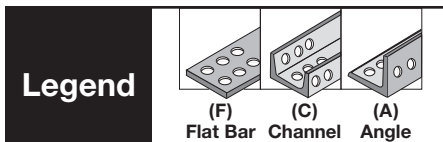

Punches are designed to punch mild or structural steel. For other materials contact Hougen Technical Service.




# PUNCH-PRO™ — MODEL 75002.5PR

ROUND PUNCH			MATERIAL		DIE		
Nominal	Size		Part No.	Thickness	Style	Size	Part No.
	Actual	Metric					
15/64"	.234	6mm	76334	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 15/64 SA	76308
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 15/64 SB	76309
1/4"	.256	6.5mm	76335	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 1/4 SA	76310
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 1/4 SB	76311
5/16"	.315	8mm	76336	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 5/16 SA	76312
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 5/16 SB	76313
11/32"	.335	8.5mm	76337	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 11/32 SA	76314
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 11/32 SB	76315
3/8"	.394	10mm	76338	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 3/8 SA	76316
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 3/8 SB	76317
				19/64" (.297) max.	C	Die 3/8 C	75524
7/16"	.433	11mm	76339	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 7/16 SA	76318
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 7/16 SB	76319
				19/64" (.297) max.	C	Die 7/16 C	75525
15/32"	.472	12mm	75910	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 15/32 SA	75912
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 15/32 SB	75913
1/2"	.512	13mm	76340	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 1/2 SA	76320
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 1/2 SB	76321
				19/64" (.297) max.	C	Die 1/2 C	75526
9/16"	.551	14mm	76341	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 9/16 SA	76322
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 9/16 SB	76323
				19/64" (.297) max.	C	Die 9/16 C	75527
19/32"	.591	15mm	76342	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 19/32 SA	76324
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 19/32 SB	76325
5/8"	.625	15.9mm	76343	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 5/8 SA	76326
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 5/8 SB	76327
11/16"	.688	17.5mm	76344	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 11/16 SA	76328
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 11/16 SB	76329
23/32"	.709	18mm	75911	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 23/32 SA	75915
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 23/32 SB	75916
3/4"	.750	19mm	76345	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 3/4 SA	76330
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 3/4 SB	76331

OBLONG PUNCH			MATERIAL		DIE		
Nominal	Size		Part No.	Thickness	Style	Size	Part No.
	Actual	Metric					
1/4" x 3/8"	.256 x .394	6.5mm x 10mm	76347	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 1/4 x 3/8 A	76300
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 1/4 x 3/8 B	76301
1/4" x 1/2"	.256 x .512	6.5mm x 13mm	76348	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 1/4 x 1/2 A	75643
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 1/4 x 1/2 B	75644
11/32" x 1/2"	.335 x .512	8.5mm x 13mm	76349	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 11/32 x 1/2 A	75645
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 11/32 x 1/2 B	75646
11/32" x 43/64"	.335 x .669	8.5mm x 17mm	76350	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 11/32 x 43/64 A	76302
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 11/32 x 43/64 B	76303
23/64" x 17/32"	.354 x .531	9mm x 13.5mm	76351	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 23/64 x 17/32 A	76304
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 23/64 x 17/32 B	76305
3/8" x 19/32"	.394 x .591	10mm x 15mm	76352	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 3/8 x 19/32 A	76306
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 3/8 x 19/32 B	76307
7/16" x 5/8"	.433 x .625	11mm x 15.9mm	76353	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 7/16 x 5/8 A	75647
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 7/16 x 5/8 B	75648
				19/64" (.297) max.	C	Die 7/16 x 5/8 C	75687
1/2" x 3/4"	.512 x .750	13mm x 19mm	76354	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 1/2 x 3/4 A	75649
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 1/2 x 3/4 B	75650
9/16" x 13/16"	.551 x .827	14mm x 21mm	76355	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 9/16 x 13/16 A	75651
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 9/16 x 13/16 B	75652

Punch and Dies for the discontinued model 75002.5A can be found at [www.hougen.com](http://www.hougen.com)

Punching capacity data is based on mild steel of 65,000 psi tensile strength.

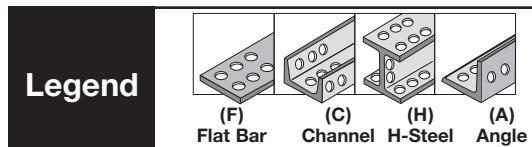

Punches are designed to punch mild or structural steel. For other materials contact Hougen Technical Service.



# PUNCH-PRO™ — MODEL 75003A

ROUND PUNCH				MATERIAL		DIE	
Nominal	Size		Part No.	Thickness	Style	Size	Part No.
	Actual	Metric					
1/4"	.256	6.5mm	75421	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 1/4 A	75454
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 1/4 B	75455
5/16"	.315	8mm	75422	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 5/16 A	75456
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 5/16 B	75457
11/32"	.335	8.5mm	75423	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 11/32 A	75458
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 11/32 B	75459
3/8"	.394	10mm	75424	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 3/8 A	75460
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 3/8 B	75461
			75476 (LP)	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H, L	Die 3/8 A	75438
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H, L	Die 3/8 B	75439
			75425	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 7/16 A	75462
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 7/16 B	75463
75477 (LP)	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H, L	Die 7/16 A	75440			
	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H, L	Die 7/16 B	75441			
7/16"	.433	11mm	75478 (LP)	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H, L	Die 7/16 A	75440
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H, L	Die 7/16 B	75441
75479 (LP)	.433	11mm	75479 (LP)	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H, L	Die 7/16 C	75451
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H, L	Die 7/16 C	75451
15/32"	.472	12mm	75917	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 15/32 A	75920
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 15/32 B	75921
75918 (LP)	.472	12mm	75918 (LP)	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H, L	Die 15/32 A	75922
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H, L	Die 15/32 B	75923
75924	.472	12mm	75924	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H, L	Die 15/32 C	75924
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H, L	Die 15/32 C	75924
1/2"	.512	13mm	75426	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 1/2 A	75464
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 1/2 B	75465
75478 (LP)	.512	13mm	75478 (LP)	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H, L	Die 1/2 A	75442
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H, L	Die 1/2 B	75443
75452	.512	13mm	75452	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H, L	Die 1/2 C	75452
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H, L	Die 1/2 C	75452
9/16"	.551	14mm	75427	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 9/16 A	75466
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 9/16 B	75467
75444	.551	14mm	75479 (LP)	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H, L	Die 9/16 A	75444
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H, L	Die 9/16 B	75445
75453	.551	14mm	75453	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H, L	Die 9/16 C	75453
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H, L	Die 9/16 C	75453
5/8"	.625	15.9mm	75428	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 5/8 A	75468
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 5/8 B	75469
11/16"	.688	17.5mm	75429	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 11/16 A	75470
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 11/16 B	75471
23/32"	.709	18mm	75919	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 23/32 A	75925
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 23/32 B	75926
3/4"	.748	19mm	75430	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 3/4 A	75472
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 3/4 B	75473
25/32"	.787	20mm	75431	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 25/32 A	75474
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 25/32 B	75475

OBLONG PUNCH				MATERIAL		DIE	
Nominal	Size		Part No.	Thickness	Style	Size	Part No.
	Actual	Metric					
1/4"	.256	6.5mm	75638	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 1/4 x 1/2 A	75656
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 1/4 x 1/2 B	75657
1/2"	.512	13mm	75666 (LP)	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H, L	Die 1/4 x 1/2 A	75643
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H, L	Die 1/4 x 1/2 B	75644
75653	.512	13mm	75653	19/64 (.297) max.	C	Die 1/4 x 1/2 C	75653
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 11/32 x 1/2 A	75658
11/32"	.335	8.5mm	75639	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 11/32 x 1/2 B	75659
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H, L	Die 11/32 x 1/2 A	75645
1/2"	.512	13mm	75667 (LP)	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H, L	Die 11/32 x 1/2 B	75646
				19/64 (.297) max.	C	Die 11/32 x 1/2 C	75654
7/16"	.433	11mm	75640	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 7/16 x 5/8 A	75660
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 7/16 x 5/8 B	75661
5/8"	.650	16.5mm	75668 (LP)	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H, L	Die 7/16 x 5/8 A	75647
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H, L	Die 7/16 x 5/8 B	75648
75655	.650	16.5mm	75655	19/64 (.297) max.	C	Die 7/16 x 5/8 C	75655
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 1/2 x 3/4 A	75662
1/2"	.512	13mm	75641	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 1/2 x 3/4 B	75663
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die LD 9/16 x 13/16 A	75664
13/16"	.827	21mm	75642	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die LD 9/16 x 13/16 B	75665



Punching capacity data is based on mild steel of 65,000 psi tensile strength.

### Legend

(F)	(C)	(H)	(A)	(L)
Flat Bar	Channel	H-Steel	Angle	Lip Channel

**LP=Long Punch**  
**LD=Long Die**


# PUNCH-PRO™ — MODEL 75004PR

ROUND PUNCH			MATERIAL		DIE		
Nominal	Size		Part No.	Thickness	Style	Size	Part No.
	Actual	Metric					
15/64"	.234	6mm	76334	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 15/64 SA	76308
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 15/64 SB	76309
1/4"	.256	6.5mm	76335	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 1/4 SA	76310
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 1/4 SB	76311
5/16"	.315	8mm	76336	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 5/16 SA	76312
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 5/16 SB	76313
11/32"	.335	8.5mm	76337	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 11/32 SA	76314
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 11/32 SB	76315
3/8"	.394	10mm	76338	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 3/8 SA	76316
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 3/8 SB	76317
				5/16 (.312) max.	C	Die 3/8 C	75524
7/16"	.433	11mm	76339	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 7/16 SA	76318
				5/64 (.078) to 3/8 (.375)	F, A, H	Die 7/16 SB	76319
				5/16 (.312) max.	C	Die 7/16 C	75525
15/32"	.472	12mm	75910	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 15/32 SA	75912
				5/64 (.078) to 3/8 (.375)	F, A, H	Die 15/32 SB	75913
1/2"	.512	13mm	76340	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 1/2 SA	76320
				5/64 (.078) to 3/8 (.375)	F, A, H	Die 1/2 SB	76321
				5/16 (.312) max.	C	Die 1/2 C	75526
9/16"	.551	14mm	76341	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 9/16 SA	76322
				5/64 (.078) to 3/8 (.375)	F, A, H	Die 9/16 SB	76323
				5/16 (.312) max.	C	Die 9/16 C	75527
19/32"	.591	15mm	76342	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 19/32 SA	76324
				5/64 (.078) to 3/8 (.375)	F, A, H	Die 19/32 SB	76325
5/8"	.625	15.9mm	76343	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 5/8 SA	76326
				5/64 (.078) to 3/8 (.375) 14 to 3 GA.	F, A, H	Die 5/8 SB	76327
				5/16 (.312) max.	C	Die 5/8 C	75528
11/16"	.688	17.5mm	76344	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 11/16 SA	76328
				5/64 (.078) to 3/8 (.375)	F, A, H	Die 11/16 SB	76329
				5/16 (.312) max.	C	Die 11/16 C	75529
23/32"	.709	18mm	75911	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 23/32 SA	75915
				5/64 (.078) to 3/8 (.375)	F, A, H	Die 23/32 SB	75916
3/4"	.750	19mm	76345	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 3/4 SA	76330
				5/64 (.078) to 3/8 (.375)	F, A, H	Die 3/4 SB	76331
				5/16 (.312) max.	C	Die 3/4 C	75530
25/32"	.787	20mm	76346	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 25/32 SA	76332
				5/64 (.078) to 3/8 (.375)	F, A, H	Die 25/32 SB	76333
				5/16 (.312) max.	C	Die 25/32 C	75531

OBLONG PUNCH			MATERIAL		DIE		
Nominal	Size		Part No.	Thickness	Style	Size	Part No.
	Actual	Metric					
1/4"	.256	6.5mm	76347	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 1/4 x 3/8 A	76300
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 1/4 x 3/8 B	76301
1/4"	.256	6.5mm	76348	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 1/4 x 1/2 A	75643
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 1/4 x 1/2 B	75644
11/32"	.335	8.5mm	76349	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 11/32 x 1/2 A	75645
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 11/32 x 1/2 B	75646
11/32"	.335	8.5mm	76350	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 11/32 x 43/64 A	76302
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 11/32 x 43/64 B	76303
23/64"	.354	9mm	76351	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 23/64 x 17/32 A	76304
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 23/64 x 17/32 B	76305
3/8"	.394	10mm	76352	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 3/8 x 19/32 A	76306
				5/64 (.078) to 1/4 (.250) 14 to 3 GA.	F, A, H	Die 3/8 x 19/32 B	76307
7/16"	.433	11mm	76353	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 7/16 x 5/8 A	75647
				5/64 (.078) to 3/8 (.375) 14 to 3 GA.	F, A, H	Die 7/16 x 5/8 B	75648
5/8"	.625	15.9mm	76354	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 7/16 x 5/8 C	75687
				5/16 (.312) max.	C	Die 7/16 x 5/8 C	75687
1/2"	.512	13mm	76355	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 1/2 x 3/4 A	75649
				5/64 (.078) to 3/8 (.375) 14 to 3 GA.	F, A, H	Die 1/2 x 3/4 B	75650
3/4"	.750	19mm	76355	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 1/2 x 3/4 C	75688
				5/16 (.312) max.	C	Die 1/2 x 3/4 C	75688
9/16"	.551	14mm	76355	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 9/16 x 13/16 A	75651
				5/64 (.078) to 3/8 (.375) 14 to 3 GA.	F, A, H	Die 9/16 x 13/16 B	75652
13/16"	.827	21mm	76355	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 9/16 x 13/16 C	75689
				5/16 (.312) max.	C	Die 9/16 x 13/16 C	75689

Punch and Dies for the discontinued model 75004R can be found at [www.hougen.com](http://www.hougen.com)

Punching capacity data is based on mild steel of 65,000 psi tensile strength.

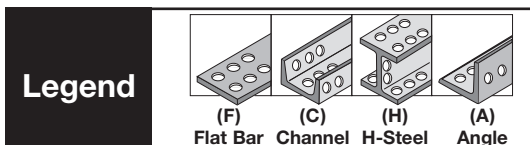

Punches are designed to punch mild or structural steel. For other materials contact Hougen Technical Service.






# PUNCH-PRO™ — MODEL 75005

ROUND PUNCH				MATERIAL		DIE	
Size			Part No.	Thickness	Style	Size	Part No.
Nominal	Actual	Metric					
7/16"	.433	11mm	75532	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 7/16 A	75541
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 7/16 B	75542
				5/16 (.312) max.	C	Die 7/16 C	75559
15/32"	.472	12mm	75937	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 15/32 A	75939
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 15/32 B	75940
				5/16 (.312) max.	C	Die 15/32 C	75941
1/2"	.512	13mm	75533	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 1/2 A	75543
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 1/2 B	75544
				5/16 (.312) max.	C	Die 1/2 C	75560
9/16"	.551	14mm	75534	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 9/16 A	75545
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 9/16 B	75546
				5/16 (.312) max.	C	Die 9/16 C	75561
5/8"	.625	15.9mm	75535	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 5/8 A	75547
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 5/8 B	75548
				5/16 (.312) max.	C	Die 5/8 C	75562
11/16"	.688	17.5mm	75536	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 11/16 A	75549
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 11/16 B	75550
				5/16 (.312) max.	C	Die 11/16 C	75563
23/32"	.709	18mm	75938	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 23/32 A	75942
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 23/32 B	75943
				5/16 (.312) max.	C	Die 23/32 C	75944
3/4"	.750	19mm	75537	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 3/4 A	75551
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 3/4 B	75552
				5/16 (.312) max.	C	Die 3/4 C	75564
25/32"	.787	20mm	75538	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 25/32 A	75553
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 25/32 B	75554
				5/16 (.312) max.	C	Die 25/32 C	75565
13/16"	.812	20.6mm	75539	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 13/16 A	75555
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 13/16 B	75556
				5/16 (.312) max.	C	Die 13/16 C	75566
7/8"	.875	22.2mm	75540	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 7/8 A	75557
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 7/8 B	75558
				5/16 (.312) max.	C	Die 7/8 C	75567

OBLONG PUNCH				MATERIAL		DIE	
Size			Part No.	Thickness	Style	Size	Part No.
Nominal	Actual	Metric					
7/16" x 5/8"	.433 x .650	11mm x 16.5mm	75690	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 7/16 x 5/8 A	75694
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 7/16 x 5/8 B	75695
				5/16 (.312) max.	C	Die 7/16 x 5/8 C	75702
1/2" x 3/4"	.512 x .768	13mm x 19.5mm	75691	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 1/2 x 3/4 A	75696
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 1/2 x 3/4 B	75697
				5/16 (.312) max.	C	Die 1/2 x 3/4 C	75703
9/16" x 13/16"	.551 x .827	14mm x 21mm	75692	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 9/16 x 13/16 A	75698
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 9/16 x 13/16 B	75699
				5/16 (.312) max.	C	Die 9/16 x 13/16 C	75704
11/16" x 13/16"	.709 x .827	18mm x 21mm	75693	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 11/16 x 13/16 A	75700
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 11/16 x 13/16 B	75701

Punching capacity data is based on mild steel of 65,000 psi tensile strength.

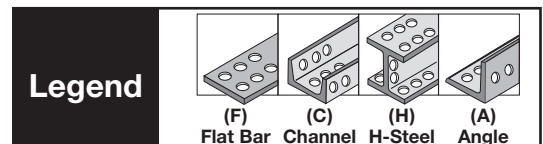

Punches are designed to punch mild or structural steel. For other materials contact Hougen Technical Service.


# PUNCH-PRO™ — MODEL 75006

ROUND PUNCH				MATERIAL		DIE	
Size			Part No.	Thickness	Style	Size	Part No.
Nominal	Actual	Metric					
<b>3/8"</b>	.394	10mm	<b>75945</b>	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 3/8 A	<b>75948</b>
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 7/16 A	<b>75578</b>
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 7/16 B	<b>75579</b>
<b>7/16"</b>	.433	11mm	<b>75568</b>	>1/4 (.250) to 3/8 (.375)	F, A, H	Die 7/16 C	<b>75580</b>
				5/16 (.312) max.	C	Die 7/16 CC	<b>75616</b>
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 15/32 A	<b>75949</b>
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 15/32 B	<b>75950</b>
<b>15/32"</b>	.472	12MM	<b>75946</b>	>1/4 (.250) to 3/8 (.375)	F, A, H	Die 15/32 C	<b>75951</b>
				5/16 (.312) max.	C	Die 15/32 CC	<b>75952</b>
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 1/2 A	<b>75581</b>
<b>1/2"</b>	.512	13MM	<b>75569</b>	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 1/2 B	<b>75582</b>
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 1/2 C	<b>75583</b>
				5/16 (.312) max.	C	Die 1/2 CC	<b>75617</b>
<b>9/16"</b>	.552	14mm	<b>75570</b>	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 9/16 A	<b>75584</b>
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 9/16 B	<b>75585</b>
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 9/16 C	<b>75586</b>
				>3/8 (.375) to 1/2 (.500)	F, A, H	Die 9/16 D	<b>75587</b>
				5/16 (.312) max.	C	Die 9/16 CC	<b>75618</b>
<b>5/8"</b>	.625	15.9mm	<b>75571</b>	>5/16 (.312) to 1/2 (.500)	C	Die 9/16 CD	<b>75619</b>
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 5/8 A	<b>75588</b>
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 5/8 B	<b>75589</b>
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 5/8 C	<b>75590</b>
				>3/8 (.375) to 1/2 (.500)	F, A, H	Die 5/8 D	<b>75591</b>
<b>11/16"</b>	.688	17.5mm	<b>75572</b>	5/16 (.312) max.	C	Die 5/8 CC	<b>75620</b>
				>5/16 (.312) to 1/2 (.500)	C	Die 5/8 CD	<b>75621</b>
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 11/16 A	<b>75592</b>
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 11/16 B	<b>75593</b>
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 11/16 C	<b>75594</b>
<b>23/32"</b>	.709	18mm	<b>75947</b>	>3/8 (.375) to 1/2 (.500)	F, A, H	Die 11/16 D	<b>75595</b>
				5/16 (.312) max.	C	Die 11/16 CC	<b>75622</b>
				>5/16 (.312) to 1/2 (.500)	C	Die 11/16 CD	<b>75623</b>
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 23/32 A	<b>75953</b>
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 23/32 B	<b>75954</b>
<b>3/4"</b>	.750	19mm	<b>75573</b>	>1/4 (.250) to 3/8 (.375)	F, A, H	Die 23/32 C	<b>75955</b>
				>3/8 (.375) to 1/2 (.500)	F, A, H	Die 23/32 D	<b>75956</b>
				5/16 (.312) max.	C	Die 23/32 CC	<b>75957</b>
				>5/16 (.312) to 1/2 (.500)	C	Die 23/32 CD	<b>75958</b>
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 3/4 A	<b>75596</b>
<b>13/16"</b>	.827	21mm	<b>75574</b>	>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 3/4 B	<b>75597</b>
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 3/4 C	<b>75598</b>
				>3/8 (.375) to 1/2 (.500)	F, A, H	Die 3/4 D	<b>75599</b>
				5/16 (.312) max.	C	Die 3/4 CC	<b>75624</b>
				>5/16 (.312) to 1/2 (.500)	C	Die 3/4 CD	<b>75625</b>

ROUND PUNCH				MATERIAL		DIE	
Size			Part No.	Thickness	Style	Size	Part No.
Nominal	Actual	Metric					
<b>25/32"</b>	.787	20mm	<b>75574</b>	5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 25/32 A	<b>75600</b>
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 25/32 B	<b>75601</b>
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 25/32 C	<b>75602</b>
				>3/8 (.375) to 1/2 (.500)	F, A, H	Die 25/32 D	<b>75603</b>
				5/16 (.312) max.	C	Die 25/32 CC	<b>75626</b>
<b>13/16"</b>	.812	20.6mm	<b>75575</b>	>5/16 (.312) to 1/2 (.500)	C	Die 25/32 CD	<b>75627</b>
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 13/16 A	<b>75604</b>
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 13/16 B	<b>75605</b>
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 13/16 C	<b>75606</b>
				>3/8 (.375) to 1/2 (.500)	F, A, H	Die 13/16 D	<b>75607</b>
<b>7/8"</b>	.875	22.2mm	<b>75576</b>	5/16 (.312) max.	C	Die 13/16 CC	<b>75628</b>
				>5/16 (.312) to 1/2 (.500)	C	Die 13/16 CD	<b>75629</b>
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 7/8 A	<b>75608</b>
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 7/8 B	<b>75609</b>
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 7/8 C	<b>75610</b>
<b>15/16"</b>	.938	23.8mm	<b>75577</b>	>3/8 (.375) to 1/2 (.500)	F, A, H	Die 7/8 D	<b>75611</b>
				5/16 (.312) max.	C	Die 7/8 CC	<b>75630</b>
				>5/16 (.312) to 1/2 (.500)	C	Die 7/8 CD	<b>75631</b>
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 15/16 A	<b>75612</b>
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 15/16 B	<b>75613</b>
<b>11/16"</b>	.827	21mm	<b>75708</b>	>1/4 (.250) to 3/8 (.375)	F, A, H	Die 15/16 C	<b>75614</b>
				>3/8 (.375) to 1/2 (.500)	F, A, H	Die 15/16 D	<b>75615</b>
				5/16 (.312) max.	C	Die 11/16 x 3/4 A	<b>75712</b>
				>5/16 (.312) to 1/2 (.500)	C	Die 11/16 x 3/4 B	<b>75713</b>
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 11/16 x 3/4 C	<b>75714</b>
<b>9/16"</b>	.551	14mm	<b>75707</b>	5/16 (.312) max.	C	Die 11/16 x 3/4 CC	<b>75724</b>
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 9/16 x 13/16 A	<b>75715</b>
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 9/16 x 13/16 B	<b>75716</b>
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 9/16 x 13/16 C	<b>75717</b>
				>3/8 (.375) to 1/2 (.500)	F, A, H	Die 9/16 x 13/16 D	<b>75718</b>
<b>13/16"</b>	.827	21mm	<b>75708</b>	5/16 (.312) max.	C	Die 9/16 x 13/16 CC	<b>75725</b>
				>5/16 (.312) to 1/2 (.500)	C	Die 9/16 x 13/16 CD	<b>75726</b>
				5/64 (.078) to 1/8 (.125) 14 to 11 GA.	F, A, H	Die 11/16 x 13/16 A	<b>75719</b>
				>1/8 (.125) to 1/4 (.250) 10 to 3 GA.	F, A, H	Die 11/16 x 13/16 B	<b>75720</b>
				>1/4 (.250) to 3/8 (.375)	F, A, H	Die 11/16 x 13/16 C	<b>75721</b>
<b>13/16"</b>	.827	21mm	<b>75708</b>	>3/8 (.375) to 1/2 (.500)	F, A, H	Die 11/16 x 13/16 D	<b>75722</b>
				5/16 (.312) max.	C	Die 11/16 x 13/16 CC	<b>75727</b>
				>5/16 (.312) to 1/2 (.500)	C	Die 11/16 x 13/16 CD	<b>75728</b>

Punches are designed to punch mild or structural steel. For other materials contact Hougen Technical Service.

## Model Dimensions

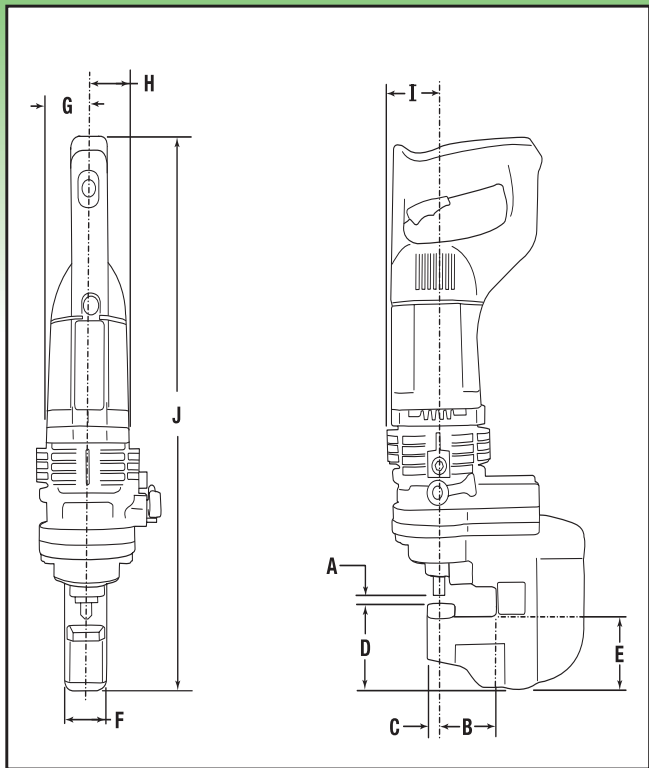

### Special Notice Regarding Punches and Dies

The exclusive Hougen®-Ogura™ punch geometry and die clearances reduces press tonnage requirements and increases portability. Premium heat treated materials help achieve tool life increases of two to two and a half times that of other manufacturers and generic copies. The use of incorrect punches or dies could result in unacceptable performance or damage to the machine and may void the warranty. Hougen Manufacturing Inc. recommends the use of only genuine Hougen-Ogura punches and dies.

Part No.	A	B	C	D	E	F	G	H	I	J
<b>76000</b>	.31	1.02	.51	1.81	—	—	—	—	—	10.60
<b>75002.5PR</b>	.33	2.36	.59	2.65	—	—	—	—	—	19.37
<b>75003A</b>	.31	2.16	.59	L.D. 4.29 STD. 2.91	—	2.59	2.47	3.06	1.94	21.42
<b>75004PR</b>	.39	1.57	.59	2.85	—	—	—	—	—	20.82
<b>75005</b>	.43	3.94	.75	2.76	4.38	2.73	2.88	3.56	3.19	21.00
<b>75006</b>	.59	1.97	.94	3.62	—	2.78	3.16	3.47	3.16	19.72

## FACTORY AUTHORIZED WARRANTY SERVICE CENTERS

For a Warranty Service Center  
near you visit

[www.hougen.com](http://www.hougen.com)

Technical Support Contact

North & South America

800-426-7818

tech@hougen.com

Australia

03 5277 2611

ausales@hougen.com



## OTHER HELPFUL INFORMATION

### Material Cutting Speed: Surface Feet per Minute (SFM)

Type of Material		Brinell Hardness	Cutting Speed (sfm)	Tool Material
<b>Aluminum</b>	• Wrought & Cast	* 30-150	500-1000	M2
	• Die cast	360.0, 380.0	450-600	M2
		383.0, 413.0	450-600	M2
		390.0, 392.0	* 40-125	M2
<b>Brass &amp; Bronze</b>		----	300-600	M2
<b>Cast Iron</b>	• Soft	120-150	75-125	M2
	• Medium	160-220	50-100	M2/M42
	• Chilled	230-300	30-50	M42
<b>Malleable Iron</b>	• Ferritic	110-160	100-130	M2
	• Pearlitic	160-220	75-100	M2
	• Tempered Matensite	200-320	30-60	M42
<b>Magnesium</b>		* 50-90	400-800	M2
<b>Nickel Alloys</b>	• 200-230	80-170	60-80	M2
	• Monel 400-404	115-240	35-50	M2
	• Monel K500, 502	150-330	20-40	M42
<b>Steel Free Machining</b>	• Resulphurized/Leaded	----	105-130	M2
<b>Carbon Steel</b>		125-160	90-110	M2
<b>Steel Alloys Soft</b>		170-210	65-90	M2
<b>Steel Alloys Medium</b>		220-250	55-75	M2
<b>Steel Alloys Hard</b>		260-300	35-50	M2/M42
		325-400	30-40	M42/ M42 Coated
<b>Tool Steel</b>	• T15, M42, D2	210-250	35-60	M2/M42
	• M2, A2			
	• S6, H13			
<b>Forgings</b>		----	40-50	M2
<b>Armor Plate</b>		200-250	40-55	M2/M42
		250-300	30-45	M42/ M42 Coated
<b>Stainless Steel Ferritic</b>	• 430/405	135-185	90-125	M2
	• 430F			
<b>Stainless Steel Austenitic</b>	• Lower BHN	135-185	55-75	M2
	• Higher BHN	225-275	40-70	M2
	• 309/316			
	• 301/304			
	• 303/203EZ			
<b>Stainless Steel Nitonic (Low Alloy)</b>		275-325	25-35	M42
<b>Stainless Steel Martensitic</b>		135-185	70-125	M2
	By Hardness Range	185-240	45-110	M2
	• 501	275-325	35-55	M42
	• 416/440F	375-425	30-55	M42 Coated
<b>Stainless Steel Precipitation Hardening Range</b>		150-200	45-55	M2
	By Hardness	275-325	40-50	M42
	• 17-4 PH	325-375	35-45	M42 Coated

### Hardness Conversion Chart

Rockwell Hardness "C" Scale	Brinell Hardness
20	226
25	253
28	271
30	286
32	301
34	319
36	336
38	353
40	371
43	400

### Grind Down Limits

Dia. Range	Minimum (Inches)	Maximum (Inches)
<b>RotaCut™</b>		
1/4", 9/32", 6mm, 7mm	No Grind Down	
5/16" - 17/32"	.0015	.0070
8mm - 14mm	.0015	.0070
9/16" - 1-1/2"	.0020	.0100
15mm - 25mm	.0020	.0100
<b>"12,000-Series"</b>		
7/16", 1/2", 12mm, 13mm	.0020	.0100
9/16" - 1-5/16"	.0020	.0150
14mm - 34mm	.0020	.0150
1-3/8" - 2-3/8"	.0020	.0200
35mm - 51mm	.0020	.0200
<b>"42,000-Series"</b>		
3/4" - 13/16"	.0020	.0150
7/8" - 2"	.0020	.0200
<b>"43,000-Series"</b>		
2-1/16" - 3-1/16"	.0020	.0200

**Visit [www.hougen.com](http://www.hougen.com)  
for an interactive Speed  
& Feed Calculator**

### Carbide Cutting Speed: Surface Feet per Minute (SFM)

Mild Steel	Stainless	Cast Iron
164	115	131

## OTHER HELPFUL INFORMATION

### Conversion Chart: SFM to RPM

Cutter Dia. (Inches)	Surface Feet per Minute Revolutions per Minute (RPM)									
	10	20	30	40	50	60	70	80	90	100
.7500	51	102	153	204	255	306	357	407	458	509
.8750	44	87	131	175	218	262	306	349	393	437
1.0000	38	76	115	153	191	229	267	306	344	382
1.1250	34	68	102	136	170	204	238	272	306	340
1.2500	31	61	92	122	153	183	214	244	275	306
1.3750	28	56	83	111	139	167	194	222	250	278
1.5000	25	51	76	102	127	153	178	204	229	255
1.6250	24	47	71	94	118	141	165	188	212	235
1.7500	22	44	65	87	109	131	153	175	196	218
1.8750	20	41	61	81	102	122	143	163	183	204
2.0000	19	38	57	76	95	115	134	153	172	191
2.1250	18	36	54	72	90	108	126	144	162	180
2.2500	17	34	51	68	85	102	119	136	153	170
2.3750	16	32	48	64	80	96	113	129	145	161
2.5000	15	31	46	61	76	92	107	122	138	153
2.6250	15	29	44	58	73	87	102	116	131	146
2.7500	14	28	42	56	69	83	97	111	125	139
2.8750	13	27	40	53	66	80	93	106	120	133
3.0000	13	25	38	51	64	76	89	102	115	127
3.1250	12	24	37	49	61	73	86	98	110	122
3.2500	12	24	35	47	59	71	82	94	106	118
3.3750	11	23	34	45	57	68	79	91	102	113
3.5000	11	22	33	44	55	64	76	87	98	109
3.6250	11	21	32	42	53	63	74	84	95	105
3.7500	10	20	31	41	51	61	71	81	92	102
3.8750	10	20	30	39	49	59	69	79	89	99
4.0000	10	19	29	38	48	57	67	76	86	95

To compute RPM's for cutting speeds other than those shown, either select two speeds from the table that add up to the speed desired and then add their RPM's, or select a factor which, when multiplied by one of the speeds in the table, gives the desired speed and multiply its RPM by the same factor.

Examples: To find the RPM for a 1" diameter cutter run at 150 SFM --  
 1) Add RPM's for 100 SFM (382) and 50 SFM (191) = 573 rpm  
 2) Or multiply the RPM for 50 SFM (191) by a factor of 3 = 573 rpm

## TECHNICAL TIPS

- **#1 cause of broken or prematurely dull cutters is too slow of feed rate. Slower feed rates will not add life to your cutter but actually reduce the cutter's life. Use firm steady feed pressure throughout cut.**
- **Always make sure to clear all chips from your cutter before starting the next hole.**
- **Make sure support system for drill arbor is in place and not worn out. If using on a drill press, a support system must be used.**
- **For harder material use Hougens's Premium Cutters or Copperhead™ Carbide Tip Cutters.**
- **Make sure mag drill is on a clean work piece and securely attached. Uneven or large build up of debris can cause drill slippage. Material must be at least 3/8" thick. Painted material can also be troublesome, paint buildup does not allow magnet to hold securely.**
- **When slug ejection becomes unreliable or tool resists cutting, sharpen or replace your cutter.**
- **Always use coolant when drilling. For best results use Hougens's Slick-Stik™ or RotaMagic™ cutting lubricant.**
- **For best performance always maintain your drill as instructed in your operator's manual.**
- **Always observe standard and specific safety instructions.**

**FOR MORE INFORMATION VISIT [WWW.HOUGEN.COM](http://WWW.HOUGEN.COM)  
OR CALL HOUGEN TECHNICAL SERVICE 800-426-7818**

# OUR COMMITMENT TO PROVIDE YOU WITH HOLEMAKING INNOVATIONS


At Hougen®, we want you to make more holes, more often, in more places all in less time... profitably. To that end, Hougen engineers are constantly striving to bring you the right tools.

Hougen Portable Magnetic Drills are just one of a family of Hole making products that can be found on the production floor or the job-site.

Ask your distributor about how Hougen's fine products can improve your Hole making productivity.

## Hougen® Industrial Annular Cutters

Produce holes faster than spade, twist, or indexable drills with less power. Improve hole accuracy, finish, and tool life. Hougen® heavy duty annular cutters with patented tooth geometry for use on lathes, mills, drills, and other high production and CNC machine tools.

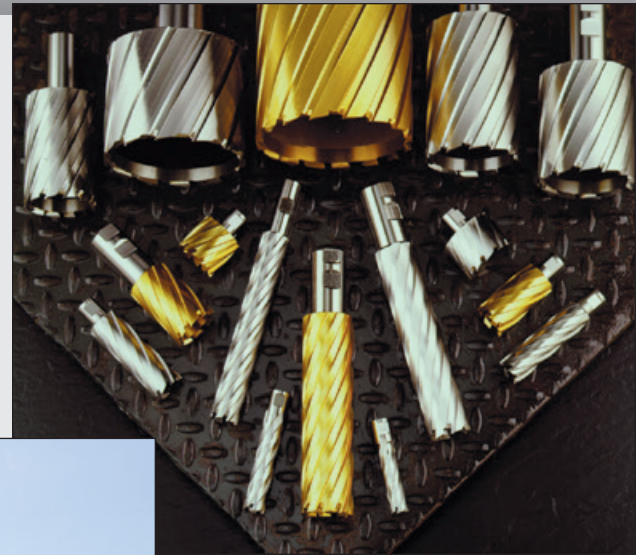

## COMMERCIAL/INDUSTRIAL LIMITED WARRANTY

Hougen Manufacturing, Inc. warrants its Portable Magnetic Drills, Electro-hydraulic Hole Punchers, Trak-Star Rail Drills, and Tornado II Paint Shakers for one (1) year, and it's Husqvarna Saw and other products for ninety (90) days from date of purchase against defects due to faulty material or workmanship and will repair or replace (at its option) without charge any items returned. This warranty is void if the item has been damaged by accident or unreasonable use, neglect, improper service, or other causes not arising out of defects in material or workmanship. No other expressed warranty is given or authorized. Hougen Manufacturing, Inc. disclaims any implied warranty of Merchantability or fitness for any period beyond the expressed warranty and shall not be liable for incidental or consequential damages. Some states do not allow exclusion of incidental or consequential damages or limitation on how long an implied warranty lasts and, if the law of such a state governs your purchase, the above exclusion and limitation may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

To obtain warranty service, return the item(s), transportation prepaid to your nearest Factory Authorized Warranty Service Center, or to Hougen Manufacturing, Inc., 3001 Hougen Drive, Swartz Creek, MI 48473.

This warranty is in lieu of any other warranty, expressed or implied, including any warranty of merchantability or fitness for a particular purpose.



## Hougen® Quality

No matter the tool, we stand behind our product 100%. If ever you are not satisfied with one of our products, let us know and we'll work to make you happy. That's why we offer the industries best...

## Service • Integrity Reliability

### Hougen Patent Notice

The products covered in this catalog may be covered by one or more of the following U.S. patents, foreign patents, and pending patents.

6,280,123	5,624,213	5,607,266	5,902,076	7,896,590	7,896,589
D445,808	D447,494	D577,750	D579,033		

Photographs and specifications are accurate in detail at time of printing. Manufacturer reserves the right to make improvements and modifications to designs without prior notice.

Hougen, Hougen-Edge, Rotabroach, and Trak-Star and their respective logos are proprietary trademarks of Hougen Manufacturing, Inc. Ogura and the Ogura logo are proprietary trademarks of Ogura & Co., Ltd., Vac-Pad is a proprietary trademark of Drillmate PTY, Ltd.



### HOUGEN MANUFACTURING, INC.

3001 Hougen Drive • Swartz Creek, MI 48473 USA  
Ph: (810) 635-7111 • Fax: (810) 635-8277  
info@hougen.com • www.hougen.com



Distributed By:

